



## MARO

Katalog razvodnih ormara

*Distribution boxes catalogue*



### **METALIS**

Podžbukni razvodni ormari s metalnim vratima  
*In wall distribution boxes with metal doors*



### **FINE**

Podžbukni razvodni ormari s plastičnim vratima  
*In wall distribution boxes with plastic doors*



### **TOWER**

Nadžbukni razvodni ormari s plastičnim vratima  
*On wall distribution boxes with plastic doors*



### **ECO**

Podžbukni razvodni ormari s plastičnim vratima  
*In wall distribution boxes with plastic doors*



### **MODULAR**

Metalni razvodni ormari za osigurače  
*Metal distribution boxes for high voltage*



### **DOMINO**

Nažbukni vodotijesni ormari  
*On wall waterproof distribution boxes*



# Sadržaj

## Content

1.1.	Metalis razvodni ormari <i>Metalis distribution boxes</i>	7
1.2.	Metalis razvodni ormari za multimediju <i>Metalis distribution boxes for multimedia</i>	11
1.3.	Metalis razvodni ormari universal <i>Metalis distribution boxes universal</i>	15
1.4.	Metalis razvodni ormari combo <i>Metalis distribution boxes combo</i>	19
1.5.	Metalis razvodni ormari za slabu struju <i>Metalis distribution boxes for low voltage power</i>	25
2.1.	Fine razvodni ormari <i>Fine distribution boxes</i>	29
2.2.	Fine razvodni ormari s dekorativnim vratima <i>Fine distribution boxes with decorative doors</i>	33
2.3.	Pribor Metalis i Fine <i>Metalis and Fine accessories</i>	37
3.1.	Tower razvodni ormari <i>Tower distribution boxes</i>	41
3.2.	Tower razvodni ormari za multimediju <i>Tower distribution boxes for multimedia</i>	47
3.3.	Tower razvodni ormari za slabu struju <i>Tower distribution boxes for low voltage power</i>	51
4.1.	Eco razvodni ormari <i>Eco distribution boxes</i>	55
4.2.	Eco razvodni ormari za multimediju <i>Eco distribution boxes for multimedia</i>	59
4.3.	Eco razvodni ormari za slabu struju <i>Eco distribution boxes for low voltage power</i>	63
4.4.	Pribor Tower i Eco <i>Tower and Eco accessories</i>	67
5.1.	Modular razvodni ormari <i>Modular distribution boxes</i>	71
5.2.	Modular razvodni ormari za slabu struju <i>Modular low voltage distribution boxes</i>	82
5.3.	Pribor Modular <i>Modular accessories</i>	91
6.1.	Domino razvodni ormari <i>Domino distribution boxes</i>	97
6.2.	Pribor Domino <i>Domino accessories</i>	101

1 1

mandeks



MARO

Metalis razvodni ormari  
*Metalis distribution boxes*

# 1.1. Metalis razvodni ormari

## Metalis distribution boxes

- metalna vrata i okvir, bijele boje RAL 9003
- sukladno normi IEC 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnja u zid od opeke i šuplje stjenke
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40

### PRILožENA OPREMA

- nosači osigurača
- pribor za instalaciju u zid od opeke/šuplje stjenke
- slijepi poklopci

### MOGUĆNOSTI

- ugradnja libele, ugradnja bravice sa ključem, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, horizontalno/vertikalno vezivanje dva ili više ormara korištenjem veznih elemenata RB80/RB81

- metal door and frame, white color RAL 9003
- in accordance with IEC 60670-1 and IEC 60670-24
- installation: In wall - brick and hollow walls
- rated current: up to 63A
- 400V~, class II
- IP40

### ACCESSORIES

- DIN rail for circuit breakers
- brick/hollow wall mounting distribution box carrier set
- blank

### POSSIBILITIES

- installation of level, installation of lock with key, change of direction of opening door to left or right side, without dismantling the frame, horizontal/vertical connection of two or more distribution boxes using the RB80/RB81 connecting elements



**RB23**  
4341117

RAZVODNI ORMAR METALIS 48+8  
DIN ČETVEROREDNI P/Ž

DISTRIBUTION BOX METALIS  
48+8 DIN FOUR ROWS IN-WALL

**RB23V0**

RAZVODNI ORMAR METALIS 48+8  
DIN ČETVEROREDNI ZA ŠUPLJE  
STJENKE P/Ž

DISTRIBUTION BOX METALIS 48+8  
DIN FOUR ROWS FOR HOLLOW  
WALLS IN-WALL



**RB20**  
4341114

RAZVODNI ORMAR METALIS 12+2  
DIN JEDNOREDNI P/Ž

DISTRIBUTION BOX METALIS  
12+2 DIN ONE ROW IN-WALL

**RB20V0**

RAZVODNI ORMAR METALIS  
12+2 DIN JEDNOREDNI ZA ŠUPLJE  
STJENKE P/Ž

DISTRIBUTION BOX METALIS  
12+2 DIN ONE ROW FOR HOLLOW  
WALLS IN-WALL



**RB21**  
4341115

RAZVODNI ORMAR METALIS 24+4  
DIN DVOREDNI P/Ž

DISTRIBUTION BOX METALIS  
24+4 DIN TWO ROWS IN-WALL

**RB21V0**

RAZVODNI ORMAR METALIS 24+4  
DIN DVOREDNI ZA ŠUPLJE STJENKE  
P/Ž

DISTRIBUTION BOX METALIS 24+4  
DIN TWO ROWS FOR HOLLOW  
WALLS IN-WALL



**RB22**  
4341116

RAZVODNI ORMAR METALIS 36+6  
DIN TROREDNI P/Ž

DISTRIBUTION BOX METALIS  
36+6 DIN THREE ROWS IN-WALL

**RB22V0**

RAZVODNI ORMAR METALIS 36+6  
DIN TROREDNI ZA ŠUPLJE STJENKE  
P/Ž

DISTRIBUTION BOX METALIS  
36+6 DIN THREE ROWS FOR  
HOLLOW WALLS IN-WALL



**RB24**

RAZVODNI ORMAR METALIS  
60+10 DIN PETEROREDNI P/Ž

DISTRIBUTION BOX METALIS  
60+10 DIN FIVE ROWS IN-WALL

**RB24V0**

RAZVODNI ORMAR METALIS  
60+10 DIN PETEROREDNI ZA  
ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS  
60+10 DIN FIVE ROWS FOR  
HOLLOW WALL IN-WALL

# 1.1.







# 1.2.



	<b>RB20 RB20VO</b>	<b>RB21 RB21VO</b>	<b>RB22 RB22VO</b>	<b>RB23 RB23VO</b>	<b>RB24 RB24VO</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 343 x 93	368 x 443 x 93	368 x 568 x 93	368 x 753 x 93	368 x 878 x 93
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 314 x 86,5	314 x 414 x 86,5	314 x 539 x 86,5	314 x 724 x 86,5	314 x 849 x 86,5

\* c - dubina / depth

				
	N		N	
<b>RB20   RB20VO</b>	(2x16)+(8x10)	(2x16)+(8x10)	(2x10)+(8x6)	(2x10)+(8x6)
<b>RB21   RB21VO</b>	(2x16)+(14x10)	(2x16)+(14x10)	(2x10)+(14x6)	(2x10)+(14x6)
<b>RB22   RB22VO</b>	2x[(2x16)+(14x10)]	2x[(2x16)+(14x10)]	2x[(2x10)+(14x6)]	2x[(2x10)+(14x6)]
<b>RB23   RB23VO</b>	2x[(2x16)+(14x10)]	2x[(2x16)+(14x10)]	2x[(2x10)+(14x6)]	2x[(2x10)+(14x6)]
<b>RB24   RB24VO</b>	2x[(2x16)+(14x10)]	2x[(2x16)+(14x10)]	2x[(2x10)+(14x6)]	2x[(2x10)+(14x6)]

**MARO**

Metalis razvodni ormari za multimediju  
Metalis distribution boxes for multimedia

# 1.2. Metalis razvodni ormari za multimediju

## Metalis distribution boxes for multimedia

- metalna perforirana vrata i okvir, bijele boje RAL 9003
- sukladno normi IEC 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnja u zid od opeke i šuplje stjenke
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40, IP30 s perforiranim vratima

### PRILOŽENA OPREMA

- nosači osigurača
- Patch Panel 12 M, keystone standard pričvršćivanja
- mrežasta montažna ploča Metalis ormara za multimediju
- nosač modema
- nosač 2M
- izolirani konektori za vod za uzemljenje/neutralni vod
- pribor za instalaciju u zid od opeke/šuplje stjenke

### MOGUĆNOSTI

- ugradnja libele, ugradnja bravice sa ključem, ugradnja dodatnog nosača modema, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, ugradnja Modul programa na nosač 2M ili korištenjem adaptera RB10, RB11, ugradnja komunikacijskih modula korištenjem Modul komunikacijski adaptera, ugradnja modularnih elemenata za Multimediju korištenjem Patch Panela, horizontalno/vertikalno vezivanje dva ili više ormara korištenjem veznih elemenata RB80/RB81

- metal perforated door and frame, white color RAL 9003
- in accordance with IEC 60670-1 and IEC 60670-24
- installation: In wall - brick walls and hollow walls
- rated current: up to 63A
- 400V~, class II
- IP40, IP30 with perforated doors

### ACCESSORIES

- DIN rail for circuit breakers
- Patch Panel 12 M, keystone fixing standard
- mounting plate for distribution box for multimedia
- modem carrier
- mounting frame 2M
- insulated connectors for earthing/neutral
- brick/hollow wall mounting distribution box carrier set

### POSSIBILITIES

- installation of level, installation of lock with key, installation of another modem carrier, change of direction of opening door to left or right side, without dismantling the frame, installation of Modul program on a 2M carrier or using the RB10, RB11, installation of communication modules using Modul communication adapters, installation of modular elements for multimedia by using Patch Panel change of direction, horizontal/vertical connection of two or more distribution boxes using the RB80/RB81 connecting elements



**RB95**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "4" P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "4" IN-WALL

**RB95V0**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "4" ZA ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "4" FOR HOLLOW WALLS IN-WALL

**RB95PP**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "4" S PATCH PANELOM 12M P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "4" WITH PATCH PANEL 12M IN-WALL

**RB95PPV0**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "4" S PATCH PANELOM 12M ZA ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "4" WITH PATCH PANEL 12M FOR HOLLOW WALLS IN-WALL

Mrežasta montažna ploča Metalis ormara za multimediju 2x

Mounting plate for distribution box for multimedia 2X

Modularna mrežasta montažna ploča Metalis ormara za multimediju

Modular mounting plate for Metalis multimedial distribution box



**RB93**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "2" P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "2" IN-WALL

**RB93V0**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "2" ZA ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "2" FOR HOLLOW WALLS IN-WALL

**RB93PP**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "2" S PATCH PANELOM 12M P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "2" WITH PATCH PANEL 12M IN-WALL

**RB93PPV0**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "2" S PATCH PANELOM 12M ZA ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "2" WITH PATCH PANEL 12M FOR HOLLOW WALLS IN-WALL

Mrežasta montažna ploča Metalis i Fine ormara za multimediju 2x

Mounting plate for distribution box for multimedia 2X



**RB94**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "3" P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "3" IN-WALL

**RB94V0**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "3" ZA ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "3" FOR HOLLOW WALLS IN WALL

**RB94PP**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "3" S PATCH PANELOM 12M P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "3" WITH PATCH PANEL 12M IN-WALL

**RB94PPV0**

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "3" S PATCH PANELOM 12M ZA ŠUPLJE STJENKE P/Ž


DISTRIBUTION BOX METALIS FOR MULTIMEDIA "3" WITH PATCH PANEL 12M FOR HOLLOW WALLS IN-WALL

Mrežasta montažna ploča Metalis ormara za multimediju 2x

Mounting plate for distribution box for multimedia 2X

Modularna mrežasta montažna ploča Metalis ormara za multimediju

Modular mounting plate for Metalis multimedial distribution box

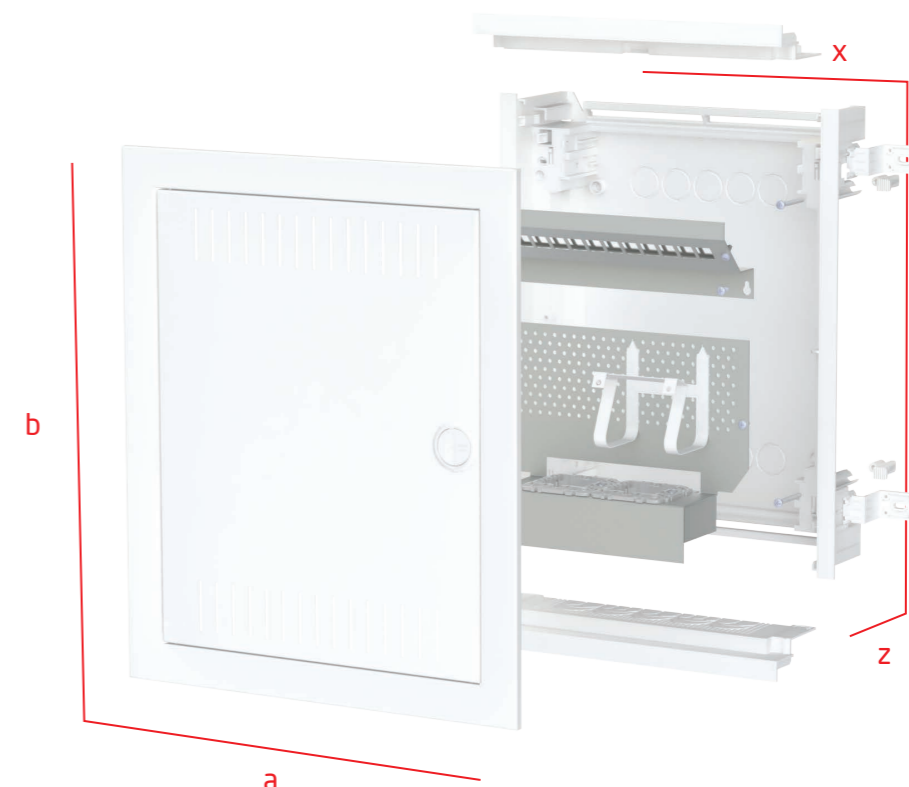

	<b>RB93 RB93V0 RB93PP RB93PPV0</b>	<b>RB94 RB94V0 RB94PP RB94PPV0</b>	<b>RB95 RB95V0 RB95PP RB95PPV0</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 443 x 93	368 x 568 x 93	368 x 753 x 93
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 414 x 86,5	314 x 539 x 86,5	314 x 724 x 86,5

\*c - dubina / depth

# 1.3.

mandeks



MARO

Metalis razvodni ormari universal

*Metalis distribution boxes universal*

# 1.3. Metalis razvodni ormari universal

## Metalis distribution boxes universal

- metalna perforirana vrata i okvir, bijele boje RAL 9003
  - sukladno normi IEC 60670-1 i IEC 60670-24
  - područje ugradnje: podžbukna ugradnjau zid od opeke i šuplje stjenke
  - nazivna struja: za uređaje do 63A
  - 400V~, razred II
  - IP30
- PRILožENA OPREMA**
- nosači osigurača
  - mrežasta montažna ploča Metalis ormara za multimediju
  - nosač 2M
  - izolirani konektori za vod za uzemljenje/neutralni vod, zadovoljavaju test užarenom niti na 960 °C
  - pribor za instalaciju u zid od opeke/šuplje stjenke
  - slijepi poklopci
  - libela
- MOGUĆNOSTI**
- ugradnja bravice s ključem, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, ugradnja dodatnog nosača modema, ugradnja Modul programa na nosač 2M ili korištenjem adaptera RB10, RB11, ugradnja komunikacijskih modula korištenjem Modul komunikacijskih adaptera, horizontalno/vertikalno vezivanje dva ili više ormara korištenjem veznih elemenata RB80/RB81

- perforated metal door and frame, white color RAL 9003
  - in accordance with IEC 60670-1 and IEC 60670-24
  - installation: In wall - brick and hollow walls
  - rated current: up to 63A
  - 400V~, class II
  - IP30
- ACCESSORIES**
- DIN rail for circuit breakers
  - mounting plate for distribution box for multimedia
  - mounting frame 2M
  - insulated connectors for earthing/neutral, suitable to glow wire test of 960 °C
  - brick/hollow wall mounting distribution box carrier set
  - blank
  - installation of level
- POSSIBILITIES**
- installation of lock with key, change of direction of opening door to left or right side, without dismantling the frame, installation of Modul program on a mounting frame 2M or using the adapter RB10, RB11, installation of communication modules using Modul communication adapters, horisontal/vertical binding two or more distribution boxes using joining elements for connection RB80/RB81



**RBU32**

RAZVODNI ORMAR METALIS UNIVERSAL 5 REDA - 3X ZA OSIGURAČE + 2X ZA MULTIMEDIJU

DISTRIBUTION BOX METALIS UNIVERSAL 5 ROWS - 3X FOR HIGH VOLTAGE + 2X FOR MULTIMEDIA

**RBU32V0**

RAZVODNI ORMAR METALIS UNIVERSAL 5 REDA - 3X ZA OSIGURAČE + 2X ZA MULTIMEDIJU ZA ŠUPLJE STJENKE

DISTRIBUTION BOX METALIS UNIVERSAL 5 ROWS - 3X FOR HIGH VOLTAGE + 2X FOR MULTIMEDIA FOR HOLLOW WALLS



**RBU22**

RAZVODNI ORMAR METALIS UNIVERSAL 4 REDA - 2X ZA OSIGURAČE + 2X ZA MULTIMEDIJU

DISTRIBUTION BOX METALIS UNIVERSAL 4 ROWS - 2X FOR HIGH VOLTAGE + 2X FOR MULTIMEDIA

**RBU22V0**

RAZVODNI ORMAR METALIS UNIVERSAL 4 REDA - 2X ZA OSIGURAČE + 2X ZA MULTIMEDIJU ZA ŠUPLJE STJENKE

DISTRIBUTION BOX METALIS UNIVERSAL 4 ROWS - 2X FOR HIGH VOLTAGE + 2X FOR MULTIMEDIA FOR HOLLOW WALLS



**RBU23**


RAZVODNI ORMAR METALIS UNIVERSAL 5 REDA - 2X ZA OSIGURAČE + 3X ZA MULTIMEDIJU

DISTRIBUTION BOX METALIS UNIVERSAL 5 ROWS - 2X FOR HIGH VOLTAGE + 3X FOR MULTIMEDIA

**RBU23V0**

RAZVODNI ORMAR METALIS UNIVERSAL 5 REDA - 2X ZA OSIGURAČE + 3X ZA MULTIMEDIJU ZA ŠUPLJE STJENKE

DISTRIBUTION BOX METALIS UNIVERSAL 5 ROWS - 2X FOR HIGH VOLTAGE + 3X FOR MULTIMEDIA FOR HOLLOW WALLS

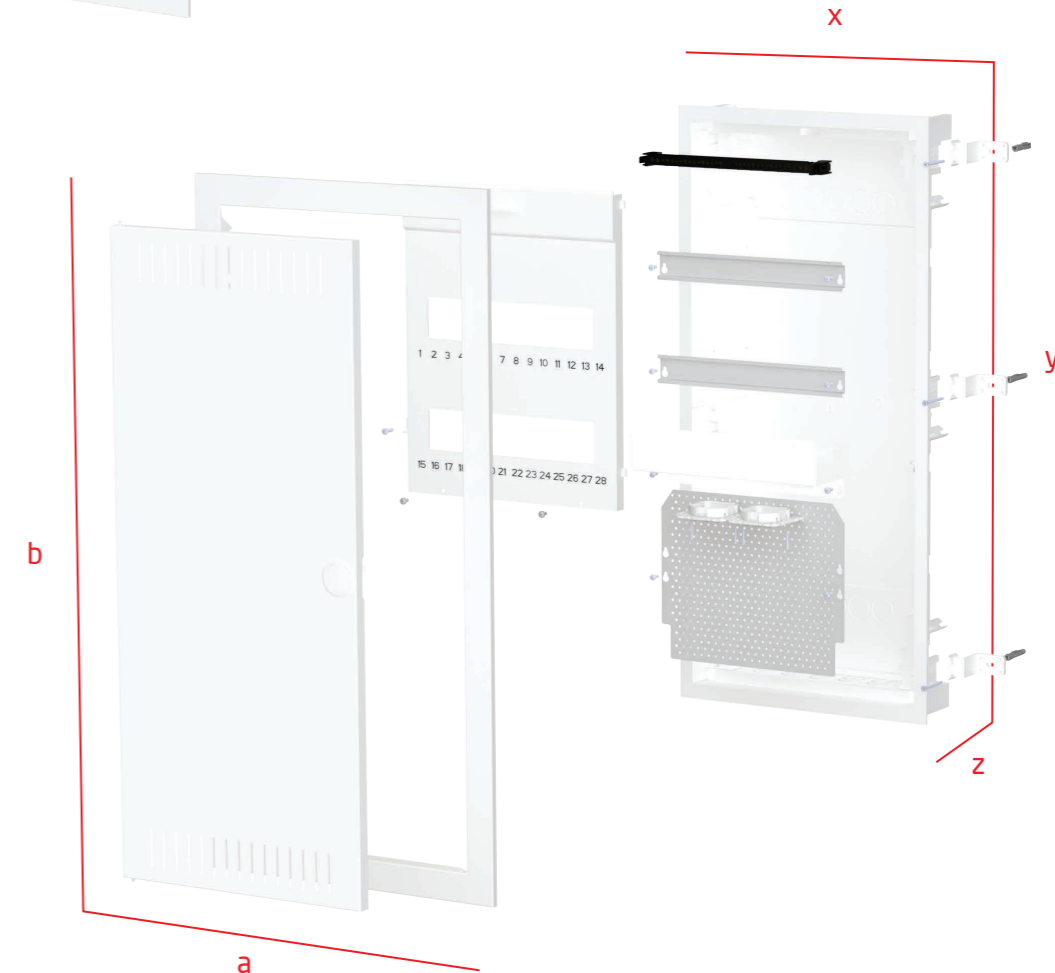

	<b>RBU22 RBU22V0</b>	<b>RBU23 RBU23V0</b>	<b>RBU32 RBU32V0</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 753 x 93	368 x 878 x 93	368 x 878 x 93
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 724 x 86,5	314 x 849 x 86,5	314 x 849 x 86,5

\* c - dubina / depth

1.4.

mandeks



MARO

Metalis razvodni ormari combo  
*Metalis distribution boxes combo*

# 1.4. Metalis razvodni ormari combo

## Metalis distribution boxes combo

- metalna perforirana vrata i okvir, bijele boje RAL 9003
- sukladno normi IEC 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnjau zid od opeke i šuplje stjenke
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40, IP30 s perforiranim vratima

### PRILOŽENA OPREMA

- nosači osigurača
- mrežasta montažna ploča Metalis ormara za multimediju
- nosač modema
- nosač 2M
- izolirani konektori za vod za uzemljenje/neutralni vod, zadovoljavaju test užarenom niti na 960 °C
- pribor za instalaciju u zid od opeke/šuplje stjenke
- slijepi poklopci
- libela

### MOGUĆNOSTI

- ugradnja bravice s ključem, ugradnja dodatnog nosača modema, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, ugradnja Modul programa na nosač 2M ili korištenjem adaptera RB10, RB11, ugradnja komunikacijskih modula korištenjem Modul komunikacijskih adaptera, ugradnja modularnih elemenata za Multimediju korištenjem Patch Panela, horizontalno/vertikalno vezivanje dva ili više ormara korištenjem veznih elemenata RB80, RB81

- perforated metal door and frame, white color RAL 9003
- in accordance with IEC 60670-1 and IEC 60670-24
- installation: In wall - brick and hollow walls
- rated current: up to 63A
- 400V~, class II
- IP40, IP30 with perforated doors

### ACCESSORIES

- DIN rail for circuit breakers
- mounting plate for distribution box for multimedia
- modem carrier
- mounting frame 2M
- insulated connectors for earthing/neutral, suitable to glow wire test of 960 °C
- brick/hollow wall mounting distribution box carrier set
- blank
- installation of level

### POSSIBILITIES

- installation of lock with key, installation of another modem carrier, change of direction of opening door to left or right side, without dismantling the frame, installation of Modul program on a mounting frame 2M or using the adapter RB10, RB11, installation of communication modules using Modul communication adapters, installation of modular elements by using Patch Panel, horizontal/vertical binding two or more distribution boxes using joining elements for connection RB80, RB81



**RBC22H**

HORIZONTALNI RAZVODNI ORMAR METALIS COMBO 2X ZA OSIGURAČE + 2X ZA MULTIMEDIJU

HORIZONTAL DISTRIBUTION BOX METALIS COMBO 2X FOR HIGH VOLTAGE + 2X FOR MULTIMEDIA

**RBC22HVO**

HORIZONTALNI RAZVODNI ORMAR METALIS COMBO 2X ZA OSIGURAČE + 2X ZA MULTIMEDIJU ZA ŠUPLJE STJENKE

HORIZONTAL DISTRIBUTION BOX METALIS COMBO 2X FOR HIGH VOLTAGE + 2X FOR MULTIMEDIA FOR HOLLOW WALLS



**RBC33H**

HORIZONTALNI RAZVODNI ORMAR METALIS COMBO 3X ZA OSIGURAČE + 3X ZA MULTIMEDIJU

HORIZONTAL DISTRIBUTION BOX METALIS COMBO 3X FOR HIGH VOLTAGE + 3X FOR MULTIMEDIA

**RBC33HVO**

HORIZONTALNI RAZVODNI ORMAR METALIS COMBO 3X ZA OSIGURAČE + 3X ZA MULTIMEDIJU ZA ŠUPLJE STJENKE

HORIZONTAL DISTRIBUTION BOX METALIS COMBO 3X FOR HIGH VOLTAGE + 3X FOR MULTIMEDIA FOR HOLLOW WALLS



**RBC44H**

HORIZONTALNI RAZVODNI ORMAR METALIS COMBO 4X ZA OSIGURAČE + 4X ZA MULTIMEDIJU

HORIZONTAL DISTRIBUTION BOX METALIS COMBO 4X FOR HIGH VOLTAGE + 4X FOR MULTIMEDIA

**RBC44HVO**

HORIZONTALNI RAZVODNI ORMAR METALIS COMBO 4X ZA OSIGURAČE + 4X ZA MULTIMEDIJU ZA ŠUPLJE STJENKE

HORIZONTAL DISTRIBUTION BOX METALIS COMBO 4X FOR HIGH VOLTAGE + 4X FOR MULTIMEDIA FOR HOLLOW WALLS



**RBC55H**

HORIZONTALNI RAZVODNI ORMAR METALIS COMBO 5X ZA OSIGURAČE + 5X ZA MULTIMEDIJU

HORIZONTAL DISTRIBUTION BOX METALIS COMBO 5X FOR HIGH VOLTAGE + 5X FOR MULTIMEDIA

**RBC55HVO**

HORIZONTALNI RAZVODNI ORMAR METALIS COMBO 5X ZA OSIGURAČE + 5X ZA MULTIMEDIJU ZA ŠUPLJE STJENKE

HORIZONTAL DISTRIBUTION BOX METALIS COMBO 5X FOR HIGH VOLTAGE + 5X FOR MULTIMEDIA FOR HOLLOW WALLS

**RBC22V**

VERTIKALNI RAZVODNI  
ORMAR METALIS COMBO 2X ZA  
OSIGURAČE + 2X ZA MULTIMEDIJU

VERTICAL DISTRIBUTION BOX  
METALIS COMBO 2X FOR HIGH  
VOLTAGE + 2X FOR MULTIMEDIA

**RBC22VV0**

VERTIKALNI RAZVODNI  
ORMAR METALIS COMBO 2X ZA  
OSIGURAČE + 2X ZA MULTIMEDIJU  
ZA ŠUPLJE STJENKE

VERTICAL DISTRIBUTION BOX  
METALIS COMBO 2X FOR HIGH  
VOLTAGE + 2X FOR MULTIMEDIA  
FOR HOLLOW WALLS

**RBC23V**

VERTIKALNI RAZVODNI  
ORMAR METALIS COMBO 2X ZA  
OSIGURAČE + 3X ZA MULTIMEDIJU

VERTICAL DISTRIBUTION BOX  
METALIS COMBO 2X FOR HIGH  
VOLTAGE + 3X FOR MULTIMEDIA

**RBC23VV0**

VERTIKALNI RAZVODNI  
ORMAR METALIS COMBO 2X ZA  
OSIGURAČE + 3X ZA MULTIMEDIJU  
ZA ŠUPLJE STJENKE

VERTICAL DISTRIBUTION BOX  
METALIS COMBO 2X FOR HIGH  
VOLTAGE + 3X FOR MULTIMEDIA  
FOR HOLLOW WALLS

**RBC32V**

VERTIKALNI RAZVODNI  
ORMAR METALIS COMBO 3X ZA  
OSIGURAČE + 2X ZA MULTIMEDIJU

VERTICAL DISTRIBUTION BOX  
METALIS COMBO 3X FOR HIGH  
VOLTAGE + 2X FOR MULTIMEDIA

**RBC32VV0**

VERTIKALNI RAZVODNI  
ORMAR METALIS COMBO 3X ZA  
OSIGURAČE + 2X ZA MULTIMEDIJU  
ZA ŠUPLJE STJENKE

VERTICAL DISTRIBUTION BOX  
METALIS COMBO 3X FOR HIGH  
VOLTAGE + 2X FOR MULTIMEDIA  
FOR HOLLOW WALLS

**RBC33V**


VERTIKALNI RAZVODNI  
ORMAR METALIS COMBO 3X ZA  
OSIGURAČE + 3X ZA MULTIMEDIJU

VERTICAL DISTRIBUTION BOX  
METALIS COMBO 3X FOR HIGH  
VOLTAGE + 3X FOR MULTIMEDIA

**RBC33VV0**

VERTIKALNI RAZVODNI  
ORMAR METALIS COMBO 3X ZA  
OSIGURAČE + 3X ZA MULTIMEDIJU  
ZA ŠUPLJE STJENKE

VERTICAL DISTRIBUTION BOX  
METALIS COMBO 3X FOR HIGH  
VOLTAGE + 3X FOR MULTIMEDIA  
FOR HOLLOW WALLS

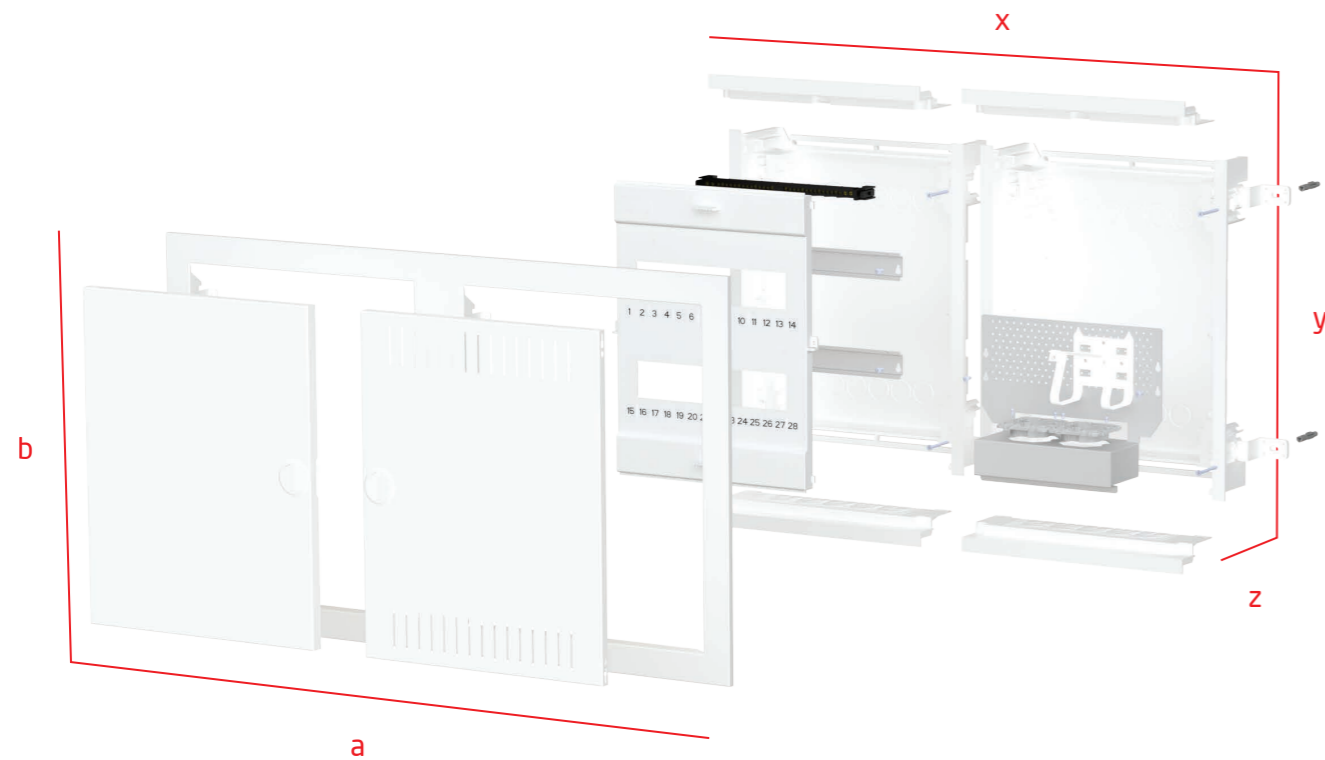

	vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)
<b>RBC22H</b> <b>RBC22HVO</b>	736 x 443 x 93	682 x 414 x 86,5
<b>RBC33H</b> <b>RBC33HVO</b>	736 x 568 x 93	682 x 539 x 86,5
<b>RBC44H</b> <b>RBC44HVO</b>	736 x 753 x 93	682 x 724 x 86,5
<b>RBC55H</b> <b>RBC55HVO</b>	736 x 878 x 93	682 x 849 x 86,5
<b>RBC22V</b> <b>RBC22VVO</b>	368 x 886 x 93	314 x 857 x 86,5
<b>RBC23V</b> <b>RBC23VVO</b>	368 x 1011 x 93	314 x 982 x 86,5
<b>RBC32V</b> <b>RBC32VVO</b>	368 x 1011 x 93	314 x 982 x 86,5
<b>RBC33V</b> <b>RBC33VVO</b>	368 x 1136 x 93	314 x 1107 x 86,5

\* c - dubina / depth

**MARO**

Metalis razvodni ormari za slabu struju  
*Metalis distribution boxes for low voltage power*

# 1.5. Metalis razvodni ormari za slabu struju

## Metalis distribution boxes for low voltage power

- metalna ili perforirana metalna vrata i okvir, bijele boje RAL 9003
- sukladno normi IEC 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnja u zid od opeke i šuplje stjenke
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40, IP30 s perforiranim vratima

### PRILOŽENA OPREMA

- pribor za instalaciju u zid od opeke/šuplje stjenke

### MOGUĆNOSTI

- ugradnja nosača osigurača, ugradnja Patch Panela, keystone standard pričvršćivanja, ugradnja mrežastih montažnih ploča ormara za multimediju, ugradnja nosača modema, ugradnja izoliranog konektora za vod za uzemljenje i neutralni vod, ugradnja bravice sa ključem, ugradnja libele, ugradnja Modul programa na nosač 2M ili korištenjem adaptera RB10, RB11, RB11, ugradnja komunikacijskih modula korištenjem Modul komunikacijskih adaptera, ugradnja modularnih elemenata za Multimediju korištenjem Patch Panela, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, horizontalno/vertikalno vezivanje dva ili više ormara korištenjem veznih elemenata RB80/RB81

- metal or perforated metal door and frame, white color RAL 9003
- in accordance with EN 60670-1 and IEC 60670-24
- installation: In wall - brick walls and hollow walls
- rated current: up to 63A
- 400V~, class II
- IP40, IP30 with perforated doors

### ACCESSORIES

- brick/hollow wall mounting distribution box carrier set

### POSSIBILITIES

- installation of DIN rail for circuit breakers, installation of Patch Panel, keystone fixing standard, installation of mounting plate for distribution box for multimedia, installation of modem carrier, installation of insulated connectors for earthing, installation of lock with key, installation of lever, installation of Modul program on a mounting frame 2M or using the adapter RB10, RB11, RB11, installation of communication modules using Modul communication adapters, installation of modular elements by using Patch Panel, change of direction of opening door to left or right side, without dismantling the frame, horizontal connection of two or more distribution boxes



**RE23**

RAZVODNI ORMAR METALIS ZA SLABU STRUJU "4" P/IŽ

LOW VOLTAGE POWER DISTRIBUTION BOX METALIS "4" IN-WALL

**RE23PV**

ZA CIGLENI ZID, SA STANDARDNIM METALNIM VRATIMA

FOR BRICK WALLS, WITH STANDARD METAL DOOR

**RE23VO**

ZA CIGLENI ZID, S PERFORIRANIM METALNIM VRATIMA

FOR BRICK WALLS, WITH PERFORATED METAL DOOR

**RE23PVVO**

ZA ŠUPLJE STJENKE, SA STANDARDNIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH STANDARD METAL DOOR

ZA ŠUPLJE STJENKE, S PERFORIRANIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH PERFORATED METAL DOOR



**RE20**  
RB29

RAZVODNI ORMAR METALIS ZA SLABU STRUJU "1" P/IŽ

LOW VOLTAGE POWER DISTRIBUTION BOX METALIS "1" IN-WALL

**RE20VO**

ZA CIGLENI ZID, SA STANDARDNIM METALNIM VRATIMA

FOR BRICK WALLS, WITH STANDARD METAL DOOR

ZA ŠUPLJE STJENKE, SA STANDARDNIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH STANDARD METAL DOOR



**RE21**  
RB98

RAZVODNI ORMAR METALIS ZA SLABU STRUJU "2" P/IŽ

LOW VOLTAGE POWER DISTRIBUTION BOX METALIS "2" IN-WALL

**RE21PV**

ZA CIGLENI ZID, SA STANDARDNIM METALNIM VRATIMA

FOR BRICK WALLS, WITH STANDARD METAL DOOR

ZA CIGLENI ZID, S PERFORIRANIM METALNIM VRATIMA

FOR BRICK WALLS, WITH PERFORATED METAL DOOR

**RE21VO**

ZA ŠUPLJE STJENKE, SA STANDARDNIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH STANDARD METAL DOOR

ZA ŠUPLJE STJENKE, S PERFORIRANIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH PERFORATED METAL DOOR



**RE22**  
RB97

RAZVODNI ORMAR METALIS ZA SLABU STRUJU "3" P/IŽ

LOW VOLTAGE POWER DISTRIBUTION BOX METALIS "3" IN-WALL

**RE22PV**

ZA CIGLENI ZID, SA STANDARDNIM METALNIM VRATIMA

FOR BRICK WALLS, WITH STANDARD METAL DOOR

ZA CIGLENI ZID, S PERFORIRANIM METALNIM VRATIMA

FOR BRICK WALLS, WITH PERFORATED METAL DOOR

**RE22VO**

ZA ŠUPLJE STJENKE, SA STANDARDNIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH STANDARD METAL DOOR

ZA ŠUPLJE STJENKE, S PERFORIRANIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH PERFORATED METAL DOOR



**RE24**

RAZVODNI ORMAR METALIS ZA SLABU STRUJU "5" P/IŽ

LOW VOLTAGE POWER DISTRIBUTION BOX METALIS "5" IN-WALL

**RE24PV**

ZA CIGLENI ZID, SA STANDARDNIM METALNIM VRATIMA

FOR BRICK WALLS, WITH STANDARD METAL DOOR

**RE24VO**

ZA CIGLENI ZID, S PERFORIRANIM METALNIM VRATIMA

FOR BRICK WALLS, WITH PERFORATED METAL DOOR

**RE24PVVO**


ZA ŠUPLJE STJENKE, SA STANDARDNIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH STANDARD METAL DOOR

ZA ŠUPLJE STJENKE, S PERFORIRANIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH PERFORATED METAL DOOR

1.5.

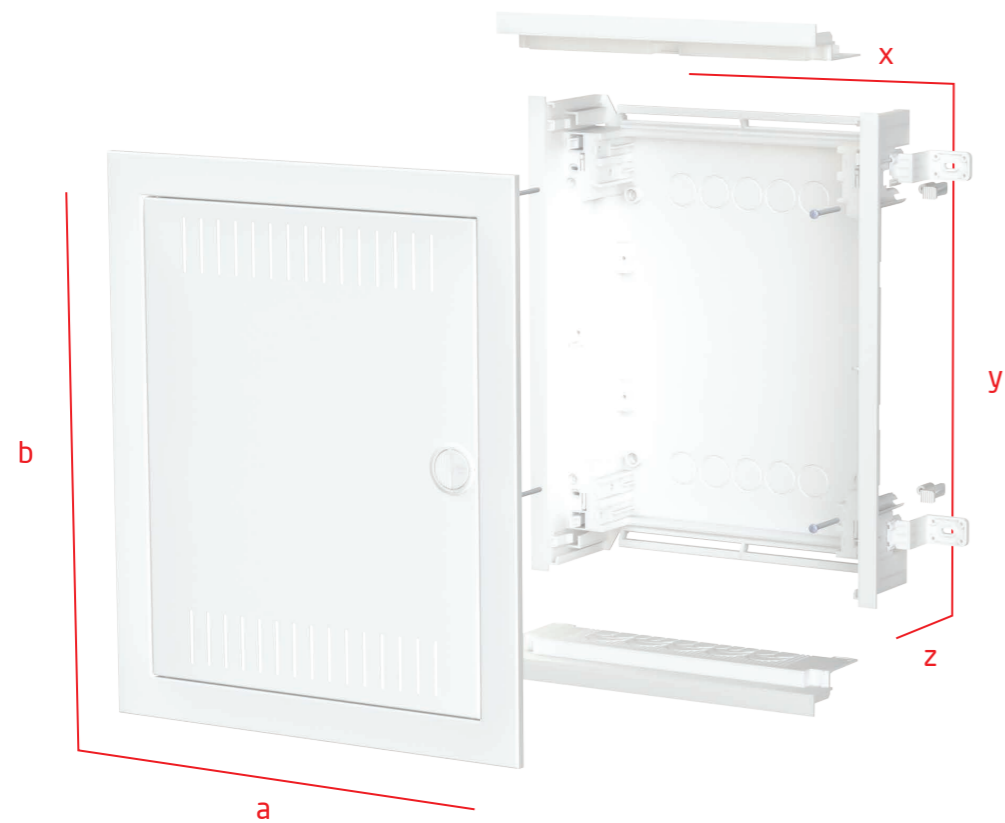

	<b>RE20 RE20VO</b>	<b>RE21 RE21PV RE21VO RE21PVVO</b>	<b>RE22 RE22PV RE22VO RE22PVVO</b>	<b>RE23 RE23PV RE23VO RE23PVVO</b>	<b>RE24 RE24PV RE24VO RE24PVVO</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 343 x 93	368 x 443 x 93	368 x 568 x 93	368 x 753 x 93	368 x 878 x 93
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 314 x 86,5	314 x 414 x 86,5	314 x 539 x 86,5	314 x 724 x 86,5	314 x 849 x 86,5

\* c - dubina / depth

2.1.

mandeks



MARO

Fine razvodni ormari  
Fine distribution boxes

## 2.1. Fine razvodni ormari

### Fine distribution boxes

- plastična vrata i okvir
- bijela boja vrata RAL 9003 ili prozirna vrata
- područje ugradnje: podžbukna ugradnja u zid od opeke
- sukladno normi IEC 60670-1 i IEC 60670-24
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40

#### PRILOŽENA OPREMA

- nosači osigurača
- pribor za instalaciju u zid od opeke
- slijepi poklopci

#### MOGUĆNOSTI

- ugradnja libele, ugradnja Modul programa, korištenjem adaptera RB1.0 i RB1.1, horizontalno/vertikalno vezivanje dva ili više ormara korištenjem veznih elemenata RB80/RB81, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira

- plastic door and frame
- white color RAL 9003 or transparent door
- installation: In wall - brick walls
- in accordance with EN 60670-1 i IEC 60670-24
- rated current: up to 63A
- 400V~, class II
- IP40

#### ACCESSORIES

- DIN rail for circuit breakers
- brick wall mounting distribution box carrier set
- blank

#### POSSIBILITIES

- installation of level, installation of Modul program by using adapters RB1.0 and RB1.1, horizontal/vertical connection of two or more distribution boxes using the RB80/RB81 connecting elements, change of direction of opening door to left or right side, without dismantling the frame



**RB22PW**

**RB22PD**

RAZVODNI ORMAR FINE 36+6  
DIN TROREDNI P/Ž

BIJELA VRATA

PROZIRNA VRATA

DISTRIBUTION BOX FINE 36+6  
DIN THREE ROWS IN-WALL

WHITE DOOR

TRANSPARENT DOOR



**RB20PW**

**RB20PD**

RAZVODNI ORMAR FINE 12+2 DIN  
JEDNOREDNI P/Ž

BIJELA VRATA

PROZIRNA VRATA

DISTRIBUTION BOX FINE 12+2  
DIN ONE ROW IN-WALL

WHITE DOOR

TRANSPARENT DOOR



**RB21PW**

**RB21PD**

RAZVODNI ORMAR FINE 24+4 DIN  
DVOREDNI P/Ž

BIJELA VRATA

PROZIRNA VRATA

DISTRIBUTION BOX FINE 24+4  
DIN TWO ROWS IN-WALL

WHITE DOOR

TRANSPARENT DOOR



	<b>RB20PW RB20PD</b>	<b>RB21PW RB21PD</b>	<b>RB22PW RB22PD</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 343 x 101	368 x 443 x 101	368 x 568 x 101
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 314 x 86,5	314 x 414 x 86,5	314 x 539 x 86,5

\* c - dubina / depth

2.2.



MARO

Fine razvodni ormari s dekorativnim vratima  
*Fine distribution boxes with decorative doors*

## 2.2. Fine razvodni ormari s dekorativnim vratima

Fine distribution boxes with decorative doors

2.2.



SIVA BOJA VRATA RAL 9006  
ELLOX SILVER DOOR RAL 9006

- RB20ES** RAZVODNI ORMAR FINE ES 12+2 DIN JEDNOREDNI P/Ž  
DISTRIBUTION BOX FINE ES 12+2 DIN ONE ROW IN-WALL
- RB21ES** RAZVODNI ORMAR FINE ES 24+4 DIN DVOREDNI P/Ž  
DISTRIBUTION BOX FINE ES 24+4 DIN TWO ROWS IN-WALL
- RB22ES** RAZVODNI ORMAR FINE ES 36+6 DIN TROREDNI P/Ž  
DISTRIBUTION BOX FINE ES 36+6 DIN THREE ROWS IN-WALL



ZLATNA BOJA VRATA PANTONE PQ-10364C  
SAND GOLD DOOR PANTONE PQ-10364C

- RB20SG** RAZVODNI ORMAR FINE SG 12+2 DIN JEDNOREDNI P/Ž  
DISTRIBUTION BOX FINE SG 12+2 DIN ONE ROW IN-WALL
- RB21SG** RAZVODNI ORMAR FINE SG 24+4 DIN DVOREDNI P/Ž  
DISTRIBUTION BOX FINE SG 24+4 DIN TWO ROWS IN-WALL
- RB22SG** RAZVODNI ORMAR FINE SG 36+6 DIN TROREDNI P/Ž  
DISTRIBUTION BOX FINE SG 36+6 DIN THREE ROWS IN-WALL




CRNA BOJA VRATA RAL 7022  
NIGHT BLACK DOOR RAL 7022

- RB20NB** RAZVODNI ORMAR FINE NB 12+2 DIN JEDNOREDNI P/Ž  
DISTRIBUTION BOX FINE NB 12+2 DIN ONE ROW IN-WALL
- RB21NB** RAZVODNI ORMAR FINE NB 24+4 DIN DVOREDNI P/Ž  
DISTRIBUTION BOX FINE NB 24+4 DIN TWO ROWS IN-WALL
- RB22NB** RAZVODNI ORMAR FINE NB 36+6 DIN TROREDNI P/Ž  
DISTRIBUTION BOX FINE NB 36+6 DIN THREE ROWS IN-WALL



VRATA U IMITACIJI SMREKE  
SPRUCE IMITATION DOOR

- RB20WP** RAZVODNI ORMAR FINE WP 12+2 DIN JEDNOREDNI P/Ž  
DISTRIBUTION BOX FINE WP 12+2 DIN ONE ROW IN-WALL
- RB21WP** RAZVODNI ORMAR FINE WP 24+4 DIN DVOREDNI P/Ž  
DISTRIBUTION BOX FINE WP 24+4 DIN TWO ROWS IN-WALL
- RB22WP** RAZVODNI ORMAR FINE WP 36+6 DIN TROREDNI P/Ž  
DISTRIBUTION BOX FINE WP 36+6 DIN THREE ROWS IN-WALL

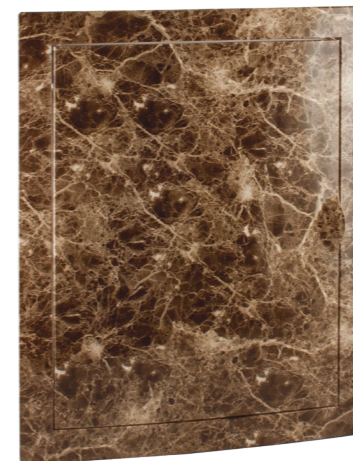



VRATA U IMITACIJI SMARAGDNOG KAMENA  
STONE EMERALD DOOR

- RB20SE** RAZVODNI ORMAR FINE SE 12+2 DIN JEDNOREDNI P/Ž  
DISTRIBUTION BOX FINE SE 12+2 DIN ONE ROW IN-WALL
- RB21SE** RAZVODNI ORMAR FINE SE 24+4 DIN DVOREDNI P/Ž  
DISTRIBUTION BOX FINE SE 24+4 DIN TWO ROWS IN-WALL
- RB22SE** RAZVODNI ORMAR FINE SE 36+6 DIN TROREDNI P/Ž  
DISTRIBUTION BOX FINE SE 36+6 DIN THREE ROWS IN-WALL




VRATA U IMITACIJI BIJELOG KAMENA  
STONE WHITE DOOR

- RB20SW** RAZVODNI ORMAR FINE SW 12+2 DIN JEDNOREDNI P/Ž  
DISTRIBUTION BOX FINE SW 12+2 DIN ONE ROW IN-WALL
- RB21SW** RAZVODNI ORMAR FINE SW 24+4 DIN DVOREDNI P/Ž  
DISTRIBUTION BOX FINE SW 24+4 DIN TWO ROWS IN-WALL
- RB22SW** RAZVODNI ORMAR FINE SW 36+6 DIN TROREDNI P/Ž  
DISTRIBUTION BOX FINE SW 36+6 DIN THREE ROWS IN-WALL

				
	N	⏏	N	⏏
<b>RB20PW   RB20ES   RB20SG   RB20NB</b> <b>RB20PD   RB20WP   RB20SE   RB20SW</b>	(2x16)+(8x10)	(2x16)+(8x10)	(2x10)+(8x6)	(2x10)+(8x6)
<b>RB21PW   RB21ES   RB21SG   RB21NB</b> <b>RB21PD   RB21WP   RB21SE   RB21SW</b>	(2x16)+(14x10)	(2x16)+(14x10)	(2x10)+(14x6)	(2x10)+(14x6)
<b>RB22PW   RB22ES   RB22SG   RB22NB</b> <b>RB22PD   RB22WP   RB22SE   RB22SW</b>	2x[(2x16)+(14x10)]	2x[(2x16)+(14x10)]	2x[(2x10)+(14x6)]	2x[(2x10)+(14x6)]

# 2.3.

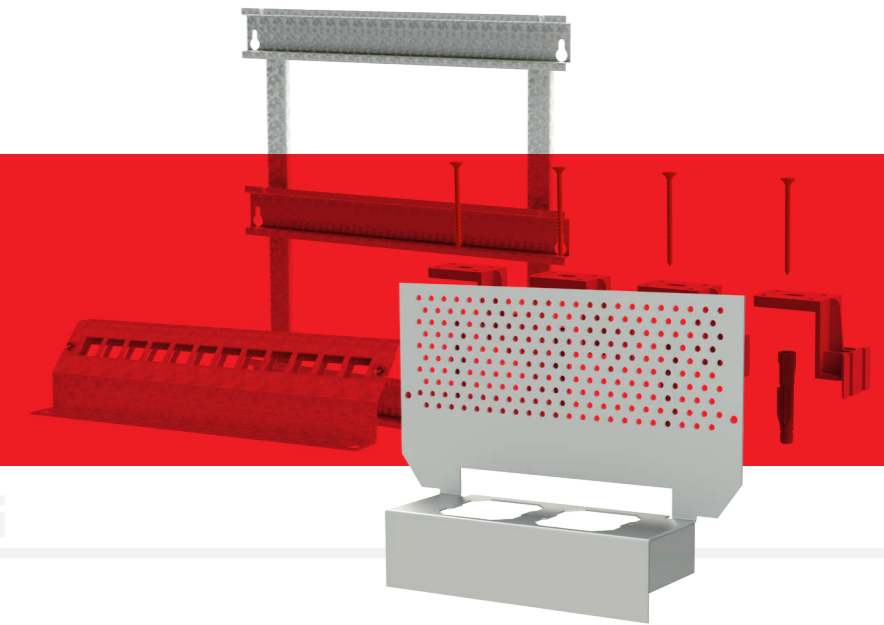


mandeks

MARO

Pribor Metalis i Fine  
*Metalis and Fine accessories*

## 2.3. Pribor Metalis i Fine Metalis and Fine accessories

IZOLACIJA ZA SABIRNICU 12 DIN ISOLATION FOR TERMINALS 12 DIN	<b>RBBS12</b>		METALIS, FINE	RBNS4, RBNS10, RBNS16	moguća ugradnja possible installation
NOSAČ SA SABIRNICOM 12 DIN TERMINAL STRIP 12 DIN	<b>RB12</b>		METALIS, FINE		presjek rupe hole dimension
MESINGANA SABIRNICA 6x9x32 mm BRASS TERMINAL STRIP 6x9x32 mm	<b>RBNS4</b>		RBBS04, RBBS08, RBBS12, RBBS18		(2x16)+(2x10), (2x10)+(2x6)
MESINGANA SABIRNICA 6x9x69 mm BRASS TERMINAL STRIP 6x9x69 mm	<b>RBNS10</b>		RBBS08, RBBS12, RBBS18		(2x16)+(8x10), (2x10)+(8x6)
MESINGANA SABIRNICA 6x9x105 mm BRASS TERMINAL STRIP 6x9x105 mm	<b>RBNS16</b>		RBBS12, RBBS18		(2x16)+(14x10), (2x10)+(14x6)

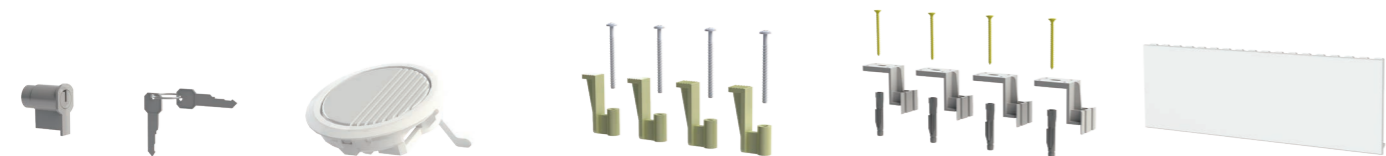


- RB13**  
BRAVICA S KLJUČEM ZA RAZVODNE ORMARE  
LOCK WITH KEY FOR DISTRIBUTION BOX
- RB13BK**  
BRAVICA METALIS RAZVODNOG ORMARA  
LOCK FOR METALIS DISTRIBUTION BOX
- RB14**  
SET NOSAČA ORMARA ZA MONTAŽU U ŠUPLJE STIJENKE  
HOLLOW WALL MOUNTING DISTRIBUTION BOX CARRIER SET
- RB15**  
SET NOSAČA ORMARA ZA MONTAŽU U ZID  
BRICK WALL MOUNTING DISTRIBUTION BOX CARRIER SET
- RB16**  
POPUNA PREDNJE STRANE ORMARA 9DIN  
BLIND ELEMENT FOR DISTRIBUTION BOX 9DIN



- RB17**  
NOSAČ SA SABIRNICOM N (7x16mm<sup>2</sup>)  
TERMINAL STRIP N (7x16mm<sup>2</sup>)
- NM21**  
NOSAČ 2M  
MOUNTING FRAME 2M
- RB89**  
LIBELA MARO ORMARA  
LEVEL FOR MARO DISTRIBUTION BOXES
- RB10**  
ADAPTER ZA DIN TRAIČNICU 35mm 1M  
ADAPTER FOR DIN RAIL 35mm 1M
- RB11**  
ADAPTER ZA DIN TRAIČNICU 35mm 2M  
ADAPTER FOR DIN RAIL 35mm 2M

## 2.3.

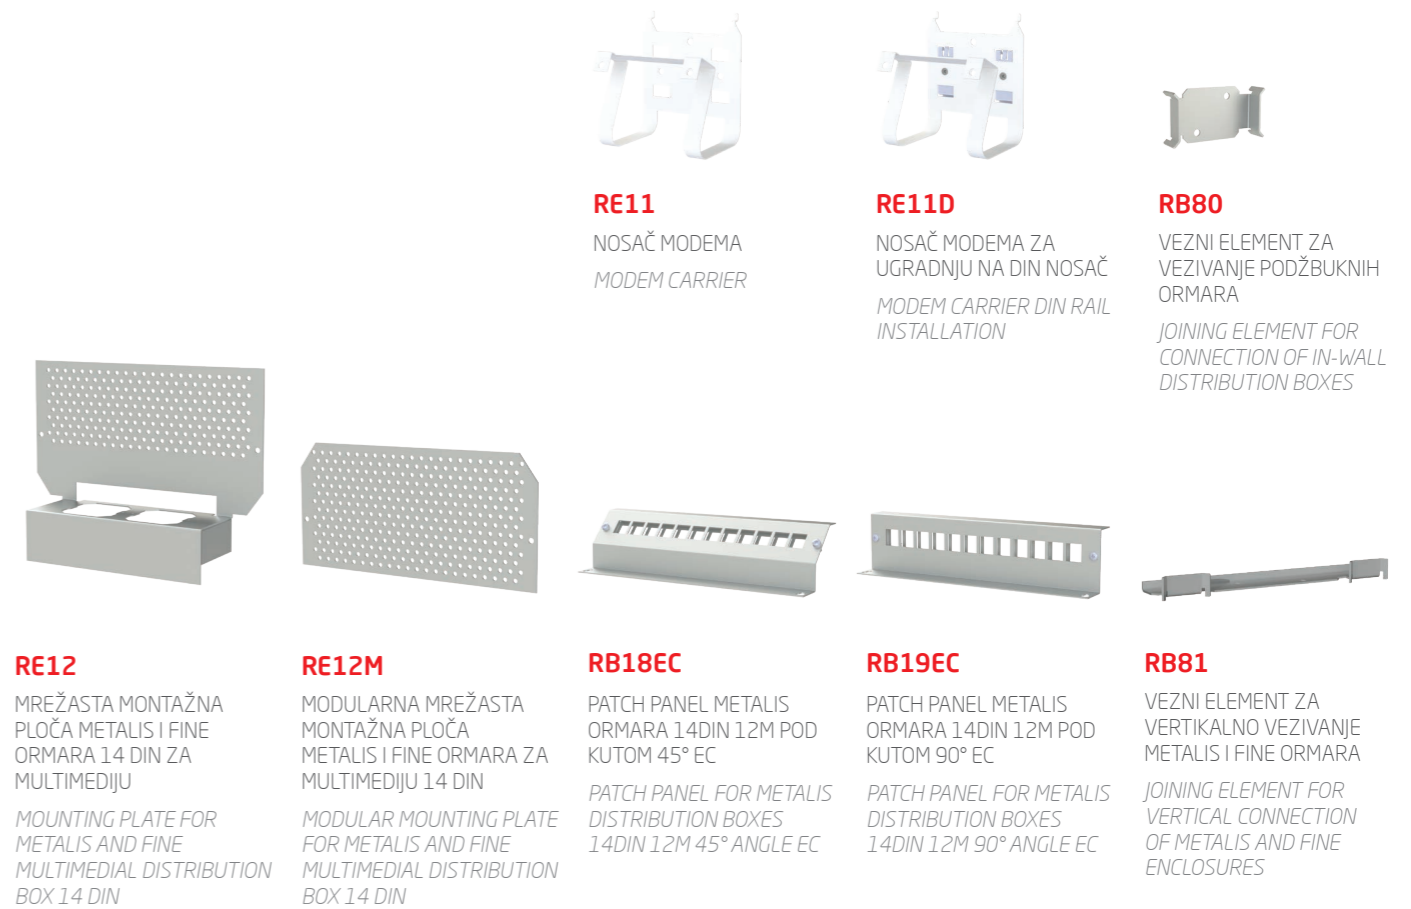

- RE11**  
NOSAČ MODEMA  
MODEM CARRIER
- RE11D**  
NOSAČ MODEMA ZA UGRADNJU NA DIN NOSAČ  
MODEM CARRIER DIN RAIL INSTALLATION
- RB80**  
VEZNI ELEMENT ZA VEZIVANJE PODŽBUKNIH ORMARA  
JOINING ELEMENT FOR CONNECTION OF IN-WALL DISTRIBUTION BOXES
- RE12**  
MREŽASTA MONTAŽNA PLOČA METALIS I FINE ORMARA 14 DIN ZA MULTIMEDIJU  
MOUNTING PLATE FOR METALIS AND FINE MULTIMEDIA DISTRIBUTION BOX 14 DIN
- RE12M**  
MODULARNA MREŽASTA MONTAŽNA PLOČA METALIS I FINE ORMARA ZA MULTIMEDIJU 14 DIN  
MODULAR MOUNTING PLATE FOR METALIS AND FINE MULTIMEDIA DISTRIBUTION BOX 14 DIN
- RB18EC**  
PATCH PANEL METALIS ORMARA 14DIN 12M POD KUTOM 45° EC  
PATCH PANEL FOR METALIS DISTRIBUTION BOXES 14DIN 12M 45° ANGLE EC
- RB19EC**  
PATCH PANEL METALIS ORMARA 14DIN 12M POD KUTOM 90° EC  
PATCH PANEL FOR METALIS DISTRIBUTION BOXES 14DIN 12M 90° ANGLE EC
- RB81**  
VEZNI ELEMENT ZA VERTIKALNO VEZIVANJE METALIS I FINE ORMARA  
JOINING ELEMENT FOR VERTICAL CONNECTION OF METALIS AND FINE ENCLOSURES



- RE10**  
NOSAČ OSIGURAČA METALIS I FINE ORMARA 12+2 DIN  
12+2 DIN RAIL FOR CIRCUIT BREAKERS
- RE15**  
DVOSTRUKI NOSAČ OSIGURAČA 2X 12+2 DIN  
DOUBLE 2X 12+2 DIN RAIL FOR CIRCUIT BREAKERS
- RE16**  
TROSTRUKI NOSAČ OSIGURAČA 3X 12+2 DIN  
TRIPLE 3X 12+2 DIN RAIL FOR CIRCUIT BREAKERS
- RE17**  
ČETVEROSTRUKI NOSAČ OSIGURAČA 4X 12+2 DIN  
QUADRUPLE 4X 12+2 DIN RAIL FOR CIRCUIT BREAKERS
- RE18**  
PETEROSTRUKI NOSAČ OSIGURAČA 5X 12+2 DIN  
QUINTUPLE 5X 12+2 DIN RAIL FOR CIRCUIT BREAKERS

# 3.1.

mandeks



MARO

Tower razvodni ormari  
*Tower distribution boxes*

# 3.1. Tower razvodni ormari

## Tower distribution boxes

- plastična vrata i kućište ormara
- bijela boja vrata RAL 9003 ili prozirna vrata
- područje ugradnje: nadžbukna ugradnja
- sukladno normi IEC 60670-1 i IEC 60670-24
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40

### PRILOŽENA OPREMA

- nosači osigurača
- slijepi poklopci
- poklopci za zaštitu od prašine

### MOGUĆNOSTI

- ugradnja bravice sa ključem, ugradnja Modul opreme, korištenjem adaptera RB10 i RB11, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira

- plastic door and base
- white color RAL 9003 or transparent door
- installation: On wall
- in accordance with IEC 60670-1 and IEC 60670-24
- rated current: up to 63A
- 400V~, class II
- IP40

### ACCESSORIES

- DIN rail for circuit breakers
- blank
- dust protection

### POSSIBILITIES

- installation of lock with key, installation of Modul program by using adapters RB10 and RB11, change of direction of opening door to left or right side, without dismantling the frame




**M023PW**

**M023PD**

RAZVODNI ORMAR TOWER 18  
DIN JEDNOREDNI N/Ž  
DISTRIBUTION BOX TOWER 18  
DIN ONE ROW ON-WALL

BIJELA VRATA  
WHITE DOOR

PROZIRNA VRATA  
TRANSPARENT DOOR

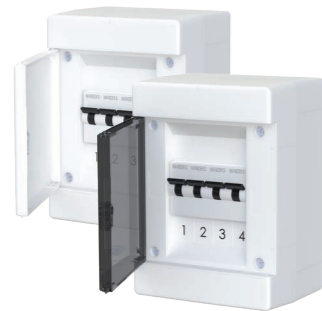

**M020PW**

**M020PD**

RAZVODNI ORMAR TOWER 4  
DIN JEDNOREDNI N/Ž  
DISTRIBUTION BOX TOWER 4  
DIN ONE ROW ON-WALL

BIJELA VRATA  
WHITE DOOR

PROZIRNA VRATA  
TRANSPARENT DOOR




**M024PW**

**M024PD**

RAZVODNI ORMAR TOWER 24  
DIN DVOREDNI N/Ž  
DISTRIBUTION BOX TOWER 24  
DIN TWO ROWS ON-WALL

BIJELA VRATA  
WHITE DOOR

PROZIRNA VRATA  
TRANSPARENT DOOR

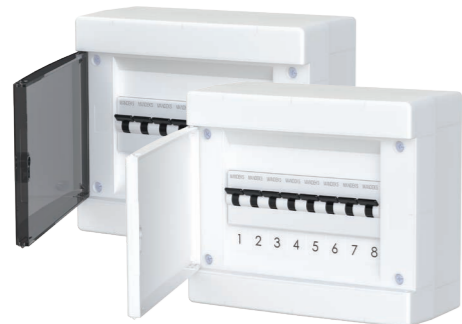

**M021PW**

**M021PD**

RAZVODNI ORMAR TOWER 8  
DIN JEDNOREDNI N/Ž  
DISTRIBUTION BOX TOWER 8  
DIN ONE ROW ON-WALL

BIJELA VRATA  
WHITE DOOR

PROZIRNA VRATA  
TRANSPARENT DOOR



**M022PW**

**M022PD**

RAZVODNI ORMAR TOWER 12  
DIN JEDNOREDNI N/Ž  
DISTRIBUTION BOX TOWER 12  
DIN ONE ROW ON-WALL

BIJELA VRATA  
WHITE DOOR

PROZIRNA VRATA  
TRANSPARENT DOOR



**M025PW**

**M025PD**

RAZVODNI ORMAR TOWER 36  
DIN TROREDNI N/Ž  
DISTRIBUTION BOX TOWER 36  
DIN THREE ROWS ON-WALL

BIJELA VRATA  
WHITE DOOR

PROZIRNA VRATA  
TRANSPARENT DOOR




RAZVODNI ORMAR TOWER 36  
DIN DVOREDNI N/Ž  
DISTRIBUTION BOX TOWER 36  
DIN TWO ROWS ON-WALL

**M027PW**

BIJELA VRATA  
WHITE DOOR

**M027PD**

PROZIRNA VRATA  
TRANSPARENT DOOR

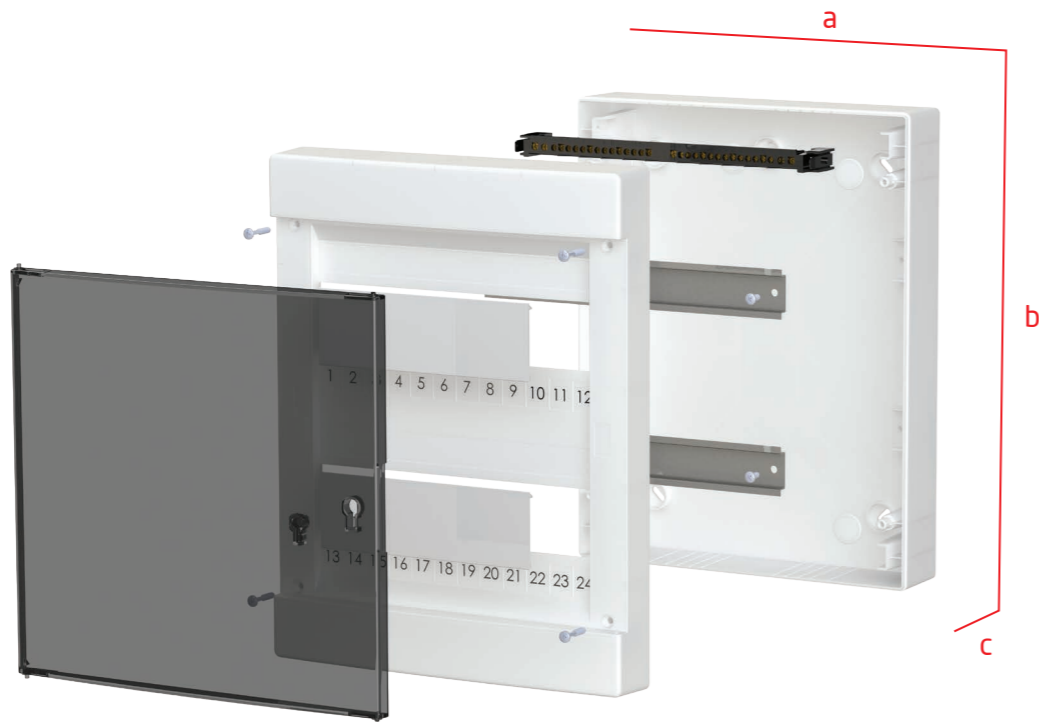

	<b>M020PW M020PD</b>	<b>M021PW M021PD</b>	<b>M022PW M022PD</b>	<b>M023PW M023PD</b>	<b>M024PW M024PD</b>	<b>M025PW M025PD</b>	<b>M027PW M027PD</b>
vanjske dimenzije proizvoda (abc) / external product dimensions (abc)	130 x 180 x 95	210 x 180 x 95	275 x 225 x 95	389 x 225 x 97	275 x 350 x 95	275 x 510 x 95	389 x 425 x 119

\* c - dubina / depth

	N	⊥	N	⊥
<b>M020PW   M020PD</b>	—	—	—	—
<b>M021PW   M021PD</b>	(2x16)+(2x10)	(2x16)+(2x10)	(2x10)+(2x6)	(2x10)+(2x6)
<b>M022PW   M022PD</b>	(2x16)+(8x10)	(2x16)+(8x10)	(2x10)+(8x6)	(2x10)+(8x6)
<b>M023PW   M023PD</b>	(2x16)+(14x10)	(2x16)+(14x10)	(2x10)+(14x6)	(2x10)+(14x6)
<b>M024PW   M024PD</b>	(2x16)+(14x10)	(2x16)+(14x10)	(2x10)+(14x6)	(2x10)+(14x6)
<b>M025PW   M025PD</b>	(2x16)+(14x10)	(2x16)+(14x10)	(2x10)+(14x6)	(2x10)+(14x6)
<b>M027PW   M027PD</b>	(2x16)+(14x10)	(2x16)+(14x10)	(2x10)+(14x6)	(2x10)+(14x6)

# 3.2.

mandeks



MARO

Tower razvodni ormari za multimediju  
*Tower distribution boxes for multimedia*

## 3.2. Tower razvodni ormari za multimediju

### Tower distribution boxes for multimedia

- plastična vrata i kućište ormara
- područje ugradnje: nadžbukna ugradnja
- bijela plastična vrata RAL 9003
- sukladno normi IEC 60670-1 i IEC 60670-24
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40, IP30 s perforiranim vratima

#### PRILOŽENA OPREMA

- Patch Panel 12M ili 18M, keystone standard pričvršćivanja
- mrežasta montažna ploča Tower ormara za multimediju
- nosač modema
- nosač 2M
- poklopci za zaštitu od prašine

#### MOGUĆNOSTI

- ugradnja bravice s ključem, ugradnja dodatnog nosača modema, ugradnja Modul programa na nosač 2M ili korištenjem adaptera RB10 i RB11, ugradnja modularnih elemenata za Multimediju korištenjem Patch Panela, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira

- plastic door and base
- installation: On wall
- white plastic door RAL 9003
- in accordance with IEC 60670-1 i IEC 60670-24
- rated current: up to 63A
- 400V~, class II
- IP40, IP30 with perforated doors

#### ACCESSORIES

- Patch Panel 12M or 18M, keystone fixing standard
- mounting plate Tower for distribution box for multimedia
- modem carrier
- mounting frame 2M
- dust protection

#### POSSIBILITIES

- installation of lock with key, installation of another modem carrier, installation of Modul program on a mounting frame 2M or by using adapters RB10 and RB11, installation of modular elements for multimedia by using Patch Panel change of direction of opening door to left or right side, without dismantling the frame



**MO47PW**

MULTIMEDIJALNI RAZVODNI ORMAR TOWER "2/18" N/Ž

DISTRIBUTION BOX TOWER FOR MULTIMEDIA "2/18" ON-WALL

**MO47PPPW**

MULTIMEDIJALNI RAZVODNI ORMAR TOWER "2/18" SA PATCH PANELOM 18 M N/Ž

DISTRIBUTION BOX TOWER FOR MULTIMEDIA "2/18" WITH PATCH PANEL 18 M ON-WALL



**MO44PW**

MULTIMEDIJALNI RAZVODNI ORMAR TOWER "2" N/Ž

DISTRIBUTION BOX TOWER FOR MULTIMEDIA "2" ON-WALL

**MO44PPPW**

MULTIMEDIJALNI RAZVODNI ORMAR TOWER "2" SA PATCH PANELOM 12M N/Ž

DISTRIBUTION BOX TOWER FOR MULTIMEDIA "2" WITH PATCH PANEL 12M ON-WALL



**MO45PW**


MULTIMEDIJALNI RAZVODNI ORMAR TOWER "3" N/Ž

DISTRIBUTION BOX TOWER FOR MULTIMEDIA "3" ON-WALL

**MO45PPPW**

MULTIMEDIJALNI RAZVODNI ORMAR TOWER "3" SA PATCH PANELOM 12M N/Ž

DISTRIBUTION BOX TOWER FOR MULTIMEDIA "3" WITH PATCH PANEL 12M ON-WALL

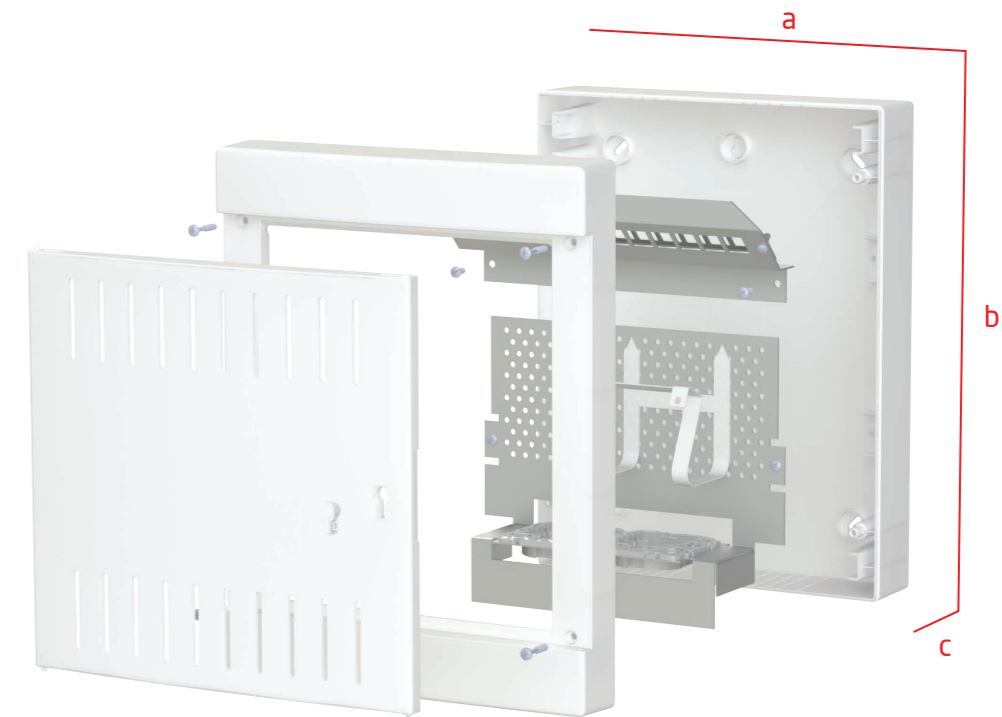

	<b>MO44PW MO44PPPW</b>	<b>MO45PW MO45PPPW</b>	<b>MO47PW MO47PPPW</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	275 x 350 x 95	275 x 510 x 95	389 x 425 x 119

\* c - dubina / depth

# 3.3.

mandeks



MARO

Tower razvodni ormari za slabu struju  
*Tower distribution boxes for low voltage power*

## 3.3. Tower razvodni ormari za slabu struju

### Tower distribution boxes for low voltage power

- plastična vrata i kućište ormara
- bijela boja vrata RAL 9003 ili prozirna vrata
- područje ugradnje: nadžbukna ugradnja
- sukladno normi IEC 60670-1 i IEC 60670-24
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40, IP30 s perforiranim vratima

#### MOGUĆNOSTI

- ugradnja Patch Panel, keystone standard pričvršćivanja, i mrežaste montažne ploče, ugradnja nosača modema i nosača ZM, ugradnja bravice s ključem, ugradnja poklopca za zaštitu od prašine, ugradnja nosača osigurača, ugradnja izoliranog konektora za vod za uzemljenje i neutralni vod, ugradnja Modul programa, korištenjem adaptera RB10 i RB11, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira,

- plastic door and base
- white color RAL 9003 or transparent door
- installation: On wall
- white plastic door
- in accordance with IEC60670-1 and IEC 60670-24
- rated current: up to 63A
- 400V~, class II
- IP40, IP30 with perforated doors

#### POSSIBILITIES

- installation of Patch Panel, keystone fixing standard, mounting plate, installation of modem carrier and mounting frame ZM, installation of lock with key, installation of dust protection, installation of DIN rail for circuit breakers, installation of insulated connectors for earthing, installation of Modul program by using adapters RB10 and RB11, change of direction of opening door to left or right side, without dismantling the frame



**M032PW**  
**M032PWPV**  
**M032PD**

RAZVODNI ORMAR TOWER  
ZA SLABU STRUJU "1/12" NIŽ

BIJELA VRATA  
BIJELA PERFORIRANA VRATA  
PROZIRNA VRATA

LOW VOLTAGE POWER  
DISTRIBUTION BOX TOWER  
"1/12" ON-WAL  
WHITE DOOR  
WHITE PERFORATED DOORS  
TRANSPARENT DOOR



**M033PW**  
**M033PWPV**  
**M033PD**

RAZVODNI ORMAR TOWER  
ZA SLABU STRUJU "1/18" NIŽ

BIJELA VRATA  
BIJELA PERFORIRANA VRATA  
PROZIRNA VRATA

LOW VOLTAGE POWER  
DISTRIBUTION BOX TOWER  
"1/18" ON-WAL  
WHITE DOOR  
WHITE PERFORATED DOORS  
TRANSPARENT DOOR



**M034PW**  
**M034PWPV**  
**M034PD**

RAZVODNI ORMAR TOWER  
ZA SLABU STRUJU "2" NIŽ

BIJELA VRATA  
BIJELA PERFORIRANA VRATA  
PROZIRNA VRATA

LOW VOLTAGE POWER  
DISTRIBUTION BOX TOWER  
"2" ON-WAL  
WHITE DOOR  
WHITE PERFORATED DOORS  
TRANSPARENT DOOR



**M035PW**  
**M035PWPV**  
**M035PD**

RAZVODNI ORMAR TOWER  
ZA SLABU STRUJU "3" NIŽ

BIJELA VRATA  
BIJELA PERFORIRANA VRATA  
PROZIRNA VRATA

LOW VOLTAGE POWER  
DISTRIBUTION BOX TOWER  
"3" ON-WAL  
WHITE DOOR  
WHITE PERFORATED DOORS  
TRANSPARENT DOOR



**M037PW**  
**M037PWPV**  
**M037PD**

RAZVODNI ORMAR TOWER  
ZA SLABU STRUJU "2/18" NIŽ

BIJELA VRATA  
BIJELA PERFORIRANA VRATA  
PROZIRNA VRATA

LOW VOLTAGE POWER  
DISTRIBUTION BOX TOWER  
"2/18" ON-WAL  
WHITE DOOR  
WHITE PERFORATED DOORS  
TRANSPARENT DOOR

3.3.



	<b>M032PW M032PWPV M032PD</b>	<b>M033PW M033PWPV M033PD</b>	<b>M034PW M034PWPV M034PD</b>	<b>M035PW M035PWPV M035PD</b>	<b>M037PW M037PWPV M037PD</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	275 x 225 x 95	389 x 225 x 97	275 x 350 x 95	275 x 510 x 95	389 x 425 x 119

\*c - dubina / depth

4.1

mandeks



MARO

Eco razvodni ormari  
Eco distribution boxes

# 4.1. Eco razvodni ormari

## Eco distribution boxes

4.1.

- plastična vrata i okvir
- bijela boja vrata RAL 9003 ili prozirna vrata
- područje ugradnje: podžbukna ugradnja u zid od opeke
- sukladno normi IEC 60670-1 i IEC 60670-24
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40

### PRILOŽENA OPREMA

- nosači osigurača
- pribor za instalaciju u zid od opeke
- slijepi poklopci

### MOGUĆNOSTI

- ugradnja bravice s ključem, ugradnja Modul programa, korištenjem adaptera RB10 i RB11, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, horizontalno i vertikalno vezivanje dva ili više ormara korištenjem veznih elemenata RB80

- plastic door and frame
- white color RAL 9003 or transparent door
- installation: In wall - brick walls
- in accordance with IEC 60670-1 i IEC 60670-24
- Rated current: up to 63A
- 400V~, class II
- IP40

### ACCESSORIES

- DIN rail for circuit breakers
- brick wall mounting distribution box carrier set
- blank

### POSSIBILITIES

- installation of lock with key, installation of Modul program by using adapters RB10 and RB11, change of direction of opening door to left or right side, without dismantling the frame, horizontal and vertical connection of two or more distribution boxes using the RB80 connecting elements




**RL25PW**  
**RL25PD**

RAZVODNI ORMAR ECO 36 DIN  
TROREDNI P/Ž

BIJELA VRATA  
PROZIRNA VRATA

DISTRIBUTION BOX ECO PD 36  
DIN THREE ROWS IN-WALL

WHITE DOOR  
TRANSPARENT DOOR

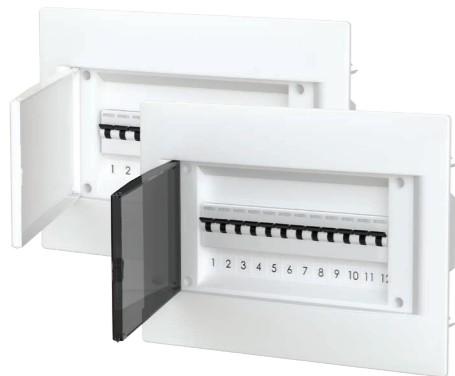

**RL22PW**  
**RL22PD**

RAZVODNI ORMAR ECO 12 DIN  
JEDNOREDNI P/Ž

BIJELA VRATA  
PROZIRNA VRATA

DISTRIBUTION BOX ECO 12 DIN  
ONE ROW IN-WALL

WHITE DOOR  
TRANSPARENT DOOR



**RL24PW**  
**RL24PD**

RAZVODNI ORMAR ECO 24 DIN  
DVOREDNI P/Ž

BIJELA VRATA  
PROZIRNA VRATA

DISTRIBUTION BOX ECO 24 DIN  
TWO ROWS IN-WALL





WHITE DOOR  
TRANSPARENT DOOR



a

	<b>RL22PW RL22PD</b>	<b>RL24PW RL24PD</b>	<b>RL25PW RL25PD</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	350 x 255 x 101	350 x 380 x 101	350 x 540 x 101
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	295 x 204 x 86,5	295 x 329 x 86,5	295 x 489 x 86,5

\* c - dubina / depth

				
	N	⊥	N	⊥
<b>RL22PW   RL22PD</b>	(2x16)+(8x10)	(2x16)+(8x10)	(2x10)+(8x6)	(2x10)+(8x6)
<b>RL24PW   RL24PD</b>	(2x16)+(14x10)	(2x16)+(14x10)	(2x10)+(14x6)	(2x10)+(14x6)
<b>RL25PW   RL25PD</b>	(2x16)+(14x10)	(2x16)+(14x10)	(2x10)+(14x6)	(2x10)+(14x6)

# 4.2.

mandeks



MARO

Eco razvodni ormari za multimediju  
*Eco distribution boxes for multimedia*

## 4.2. Eco razvodni ormari za multimediju

### Eco distribution boxes for multimedia

4.2.

- plastična vrata i okvir
- bijela boja vrata RAL 9003 ili prozirna vrata
- područje ugradnje: podžbukna ugradnja u zid od opeke
- sukladno normi IEC 60670-1 i IEC 60670-24
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40, IP30 s perforiranim vratima

#### PRILOŽENA OPREMA

- Patch Panel 12 M, keystone standard pričvršćivanja
- mrežasta montažna ploča Tower ormara za multimediju
- nosač modema
- nosač 2M

#### MOGUĆNOSTI

- ugradnja bravice s ključem, ugradnja Modul programa, korištenjem adaptera RB10 i RB11, ugradnja dodatnog nosača modema, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, horizontalno i vertikalno vezivanje dva ili više ormara korištenjem veznih elemenata RB80

- plastic door and frame
- white color RAL 9003 or transparent door
- installation: In wall - brick walls
- in accordance with EN 60670-1 i IEC 60670-24
- Rated current: up to 63A
- 400V~, class II
- IP40, IP30 with perforated doors

#### ACCESSORIES

- Patch Panel 12M, keystone fixing standard
- mounting plate Tower for distribution box for multimedia
- modem carrier
- mounting frame 2M

#### POSSIBILITIES

- installation of lock with key, installation of Modul program by using adapters RB10 and RB11, installation of another modem carrier, change of direction of opening door to left or right side, without dismantling the frame, horizontal and vertical connection of two or more distribution boxes using the RB80 connecting elements



**RL44PW**

MULTIMEDIJALNI RAZVODNI ORMAR ECO PW "2" P/Ž

DISTRIBUTION BOX ECO PW FOR MULTIMEDIA "2" IN-WALL

**RL44PPPW**

MULTIMEDIJALNI RAZVODNI ORMAR ECO PW "2" SA PATCH PANELOM 12M P/Ž

DISTRIBUTION BOX ECO PW FOR MULTIMEDIA "2" WITH PATCH PANEL 12M IN-WALL



**RL45PW**


MULTIMEDIJALNI RAZVODNI ORMAR FINE PW "3" P/Ž

DISTRIBUTION BOX FINE PW FOR MULTIMEDIA "3" IN-WALL

**RL45PPPW**

MULTIMEDIJALNI RAZVODNI ORMAR ECO PW "3" SA PATCH PANELOM 12M P/Ž

DISTRIBUTION BOX ECO PW FOR MULTIMEDIA "3" WITH PATCH PANEL 12M IN-WALL

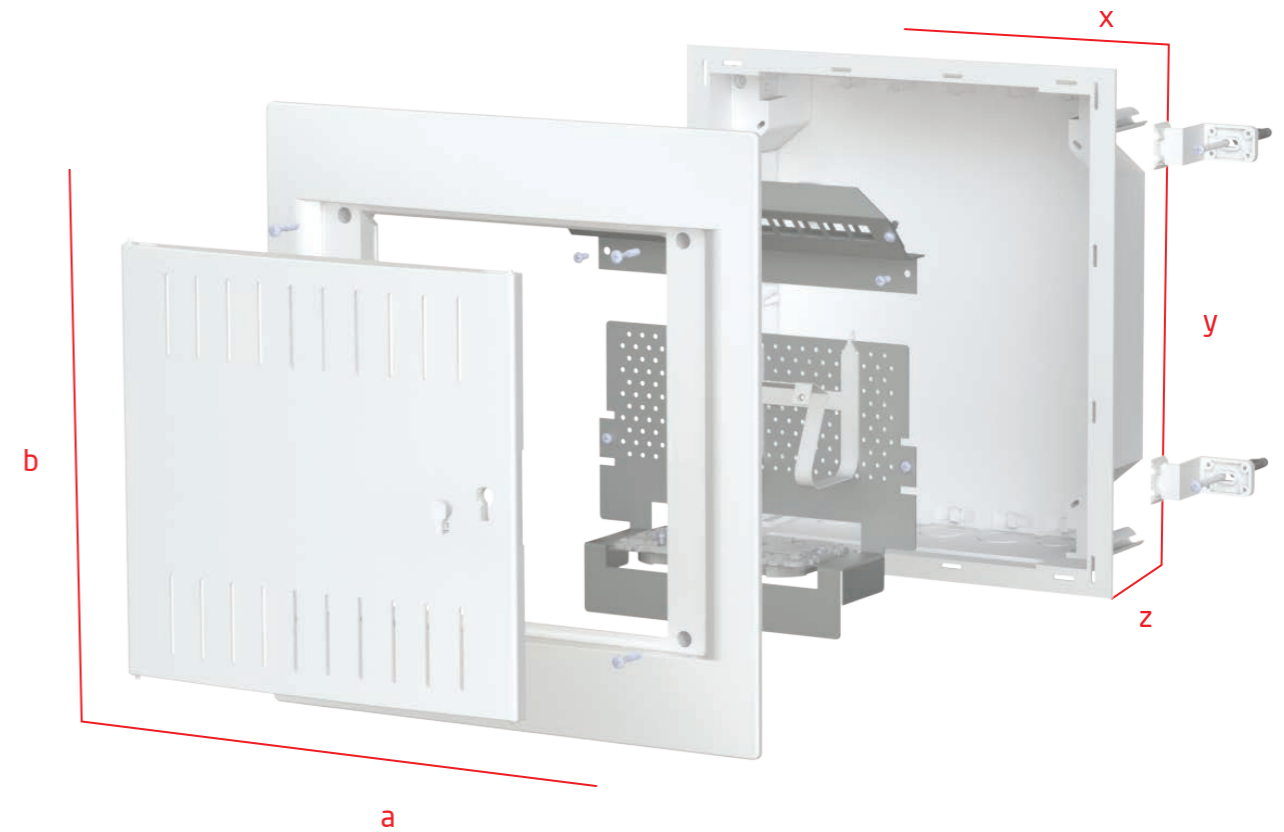

	<b>RL44PW RL44PPPW</b>	<b>RL45PW RL45PPPW</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	350 x 380 x 101	350 x 540 x 101
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	295 x 329 x 86,5	295 x 489 x 86,5

\* c - dubina / depth

# 4.3.

mandeks



MARO

Eco razvodni ormari za slabu struju  
*Eco distribution boxes for low voltage power*

## 4.3. Eco razvodni ormari za slabu struju

### Eco distribution boxes for low voltage power

4.3.

- plastična vrata i okvir
- bijela boja vrata RAL 9003 ili prozirna vrata
- područje ugradnje: podžbukna ugradnja u zid od opeke
- sukladno normi IEC 60670-1 i IEC 60670-24
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP40, IP30 s perforiranim vratima

#### MOGUĆNOSTI

- ugradnja Patch Panel 12 M, keystone standard pričvršćivanja, i mrežaste montažne ploče, ugradnja nosač modema i nosač 2M, ugradnja bravice s ključem, ugradnja Modul programa, korištenjem adaptera RB10 i RB11, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, horizontalno i vertikalno vezivanje dva ili više ormara korištenjem veznih elemenata RB80

- plastic door and frame
- white color RAL 9003 or transparent door
- installation: In wall - brick walls
- in accordance with IEC 60670-1 i IEC 60670-24
- Rated current: up to 63A
- 400V~, class II
- IP40, IP30 with perforated doors

#### POSSIBILITIES

- installation of Patch Panel 12M, keystone fixing standard, mounting plate, installation of modem carrier and mounting frame 2M, installation of lock with key, installation of Modul program by using adapters RB10 and RB11, change of direction of opening door to left or right side, without dismantling the frame, horizontal and vertical connection of two or more distribution boxes using the RB80 connecting elements



**RL35PW**

RAZVODNI ORMAR ECO  
ZA SLABU STRUJU '3' P/Ž

LOW VOLTAGE POWER  
DISTRIBUTION BOX ECO  
'3" IN-WALL

BIJELA VRATA

WHITE DOOR

**RL35PWPV**


BIJELA PERFORIRANA VRATA

WHITE PERFORATED DOORS

**RL35PD**

PROZIRNA VRATA

TRANSPARENT DOOR

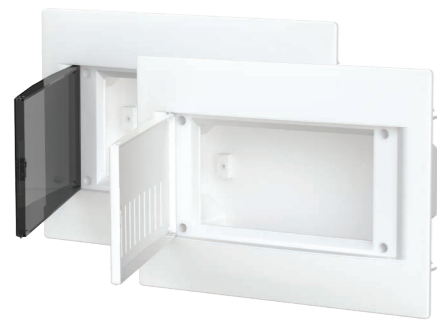

**RL32PW**

RAZVODNI ORMAR ECO  
ZA SLABU STRUJU '1' P/Ž

LOW VOLTAGE POWER  
DISTRIBUTION BOX ECO  
'1" IN-WALL

BIJELA VRATA

WHITE DOOR

**RL32PWPV**

BIJELA PERFORIRANA VRATA

WHITE PERFORATED DOORS

**RL32PD**

PROZIRNA VRATA

TRANSPARENT DOOR



**RL34PW**

RAZVODNI ORMAR ECO  
ZA SLABU STRUJU '2' P/Ž

LOW VOLTAGE POWER  
DISTRIBUTION BOX ECO  
'2" IN-WALL

BIJELA VRATA

WHITE DOOR

**RL34PWPV**

BIJELA PERFORIRANA VRATA

WHITE PERFORATED DOORS

**RL34PD**

PROZIRNA VRATA

TRANSPARENT DOOR



	<b>RL32PW RL32PWPV RL32PD</b>	<b>RL34PW RL34PWPV RL34PD</b>	<b>RL35PW RL35PWPV RL35PD</b>
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	350 x 255 x 101	350 x 380 x 101	350 x 540 x 101
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	295 x 204 x 86,5	295 x 329 x 86,5	295 x 489 x 86,5

\* c - dubina / depth


# 4.4.



mandeks

MARO

Pribor Tower i Eco  
*Tower and Eco accessories*




**RB17**  
NOSAČ SA SABIRNICOM N  
(7x16mm<sup>2</sup>)  
TERMINAL STRIP N  
(7x16mm<sup>2</sup>)



**RE11**  
NOSAČ MODEMA  
MODEM CARRIER




**RE11D**  
NOSAČ MODEMA ZA  
UGRADNJU NA DIN NOSAČ  
MODEM CARRIER DIN RAIL  
INSTALLATION




**RB14**  
SET NOSAČA ORMARA  
ZA MONTAŽU U ŠUPLJE  
STIJENKE  
HOLLOW WALL MOUNTING  
DISTRIBUTION BOX  
CARRIER SET




**RB15**  
SET NOSAČA ORMARA ZA  
MONTAŽU U ZID  
BRICK WALL MOUNTING  
DISTRIBUTION BOX  
CARRIER SET




**RE12T**  
MREŽASTA MONTAŽNA  
PLOČA ECO I TOWER  
ORMARA 12 DIN ZA  
MULTIMEDIJU  
MOUNTING PLATE FOR  
TOWER MULTIMEDIA  
DISTRIBUTION BOX 12 DIN

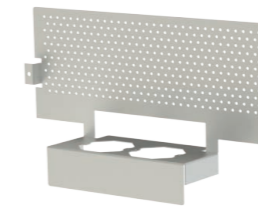

**RE12N**  
MREŽASTA MONTAŽNA  
PLOČA TOWER ORMARA 18  
DIN ZA MULTIMEDIJU  
MOUNTING PLATE FOR  
TOWER MULTIMEDIA  
DISTRIBUTION BOX 18 DIN



**RE12MT**  
MODULARNA MREŽASTA  
MONTAŽNA PLOČA ECO  
I TOWER ORMARA ZA  
MULTIMEDIJU 12 DIN  
MODULAR MOUNTING  
PLATE FOR TOWER MULTI-  
MEDIA DISTRIBUTION BOX  
12 DIN

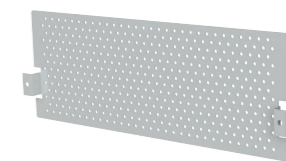

**RE12MN**  
MODULARNA MREŽASTA  
MONTAŽNA PLOČA TOWER  
ORMARA ZA MULTIMEDIJU  
18 DIN  
MODULAR MOUNTING  
PLATE FOR TOWER MULTI-  
MEDIA DISTRIBUTION BOX  
18 DIN



**RB80**  
VEZNI ELEMENT ZA  
VEZIVANJE PODŽBUKNIH  
ORMARA  
JOINING ELEMENT FOR  
CONNECTION OF IN-WALL  
DISTRIBUTION BOXES



**RB13**  
BRAVICA S KLJUČEM  
ZA RAZVODNE ORMARE  
LOCK WITH KEY FOR  
DISTRIBUTION BOX



**RB16**  
POPUNA PREDNJE  
STRANE ORMARA  
BLANK ELEMENT FOR  
DISTRIBUTION BOX 9 DIN



**RE04**  
ČEPOVI TOWER ORMARA  
ZA ZAŠTITU OD PRAŠINE  
TOWER DISTRIBUTION BOX  
CAP FOR DUST PROTECTION



**RB10**  
ADAPTER ZA DIN  
TRAČNICU 35mm 1M  
ADAPTER FOR DIN RAIL  
35mm 1M




**RB11**  
ADAPTER ZA DIN  
TRAČNICU 35MM 2M  
ADAPTER FOR DIN RAIL  
35mm 2M



**RB18ECT**  
PATCH PANEL TOWER I ECO  
ORMARA 12DIN 12M POD  
KUTOM 45° EC  
PATCH PANEL FOR TOWER  
AND ECO DISTRIBUTION  
BOXES 12DIN 12M 45°  
ANGLE EC




**RB18ECN**  
PATCH PANEL TOWER  
ORMARA 18DIN 18M  
POD KUTOM 45° EC  
PATCH PANEL FOR TOWER  
DISTRIBUTION BOXES  
18DIN 18M 45° ANGLE EC



**RB19ECT**  
PATCH PANEL TOWER I ECO  
ORMARA 12DIN 12M POD  
KUTOM 90° EC  
PATCH PANEL FOR TOWER  
AND ECO DISTRIBUTION  
BOXES 12DIN 12M 90°  
ANGLE EC



**RB19ECN**  
PATCH PANEL TOWER  
ORMARA 18DIN 18M POD  
KUTOM 90° EC  
PATCH PANEL FOR TOWER  
DISTRIBUTION BOXES  
18DIN 18M 90° ANGLE EC



**NM21**  
NOSAČ 2M  
MOUNTING FRAME 2M

				<i>moгуća ugradnja possible installation</i>
NOSAČ OSIGURAČA TOWER ORMARA 4 DIN RAIL FOR CIRCUIT BREAKERS 4 DIN	<b>RE05</b>		M020	
NOSAČ OSIGURAČA TOWER ORMARA 8 DIN RAIL FOR CIRCUIT BREAKERS 8 DIN	<b>RE06</b>		M021	
NOSAČ OSIGURAČA TOWER ORMARA 12 DIN RAIL FOR CIRCUIT BREAKERS 12 DIN	<b>RE07</b>		M022, M024, M025, M032, M034, M035, RL22, RL24, RL25	
NOSAČ OSIGURAČA TOWER ORMARA 18 DIN RAIL FOR CIRCUIT BREAKERS 18 DIN	<b>RE08</b>		M023, M033	
				<i>moгуćnost montaže sabirnice terminal installation possibility</i>
IZOLACIJA ZA SABIRNICU 4 DIN ISOLATION FOR TERMINALS 4 DIN	<b>RBBS04</b>		M020	RBNS4
IZOLACIJA ZA SABIRNICU 8 DIN ISOLATION FOR TERMINALS 8 DIN	<b>RBBS08</b>		M021	RBNS4, RBNS10
IZOLACIJA ZA SABIRNICU 12 DIN ISOLATION FOR TERMINALS 12 DIN	<b>RBBS12</b>		M022, M024, M025, M032, M034, M035, RL22, RL24, RL25	RBNS4, RBNS10, RBNS16
IZOLACIJA ZA SABIRNICU 18 DIN ISOLATION FOR TERMINALS 18 DIN	<b>RBBS18</b>		M023, M033	RBNS4, RBNS10, RBNS16
				<i>presjek rupe hole dimension</i>
NOSAČ SA SABIRNICOM 4 DIN TERMINAL STRIP 4 DIN	<b>RB07</b>		M020	↑ (2x16)+(2x10), (2x16)+(2x10), ↓ (2x10)+(2x6), (2x10)+(2x6)
NOSAČ SA SABIRNICOM 8 DIN TERMINAL STRIP 8 DIN	<b>RB08</b>		M021	↑ (2x16)+(2x10), (2x16)+(2x10), ↓ (2x10)+(2x6), (2x10)+(2x6)
NOSAČ SA SABIRNICOM 12 DIN TERMINAL STRIP 12 DIN	<b>RB12</b>		M022, M024, M025, M032, M034, M035, RL22, RL24, RL25	↑ (2x16)+(14x10), (2x16)+(14x10), ↓ (2x10)+(14x6), (2x10)+(14x6)
NOSAČ SA SABIRNICOM 18 DIN TERMINAL STRIP 18 DIN	<b>RB09</b>		M023, M033	↑ (2x16)+(14x10), (2x16)+(14x10), ↓ (2x10)+(14x6), (2x10)+(14x6)
MESINGANA SABIRNICA 6x9x32 mm BRASS TERMINAL STRIP 6x9x32 mm	<b>RBNS4</b>		RBBS04, RBBS08, RBBS12, RBBS18	↑ (2x16)+(2x10), ↓ (2x10)+(2x6),
MESINGANA SABIRNICA 6x9x69 mm BRASS TERMINAL STRIP 6x9x69 mm	<b>RBNS10</b>		RBBS08, RBBS12, RBBS18	↑ (2x16)+(8x10), ↓ (2x10)+(8x6),
MESINGANA SABIRNICA 6x9x105 mm BRASS TERMINAL STRIP 6x9x105 mm	<b>RBNS16</b>		RBBS12, RBBS18	↑ (2x16)+(14x10), ↓ (2x10)+(14x6),

## 5.1.

mandeks



MRO

Modular razvodni ormari  
Modular distribution boxes

# 5.1. Modular razvodni ormari

## Modular distribution boxes

5.1.

- metalni ormari bijele boje RAL 9003
- sukladno normi IEC 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnja u zid od opeke i šuplje stjenke / nadžbukna ugradnja
- 400V~, razred I
- IP30
- IK08
- temperatura ugradnje: -25°C...+60°C

#### PRILožENA OPREMA

- nosai osigurača
- izolirani konektori za vod za uzemljenje/neutralni vod, zadovoljavaju test užarenom niti na 960 °C

#### MOGUĆNOSTI

- ugradnja bravice s ključem, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, ugradnja Patch Panela, keystone standard pričvršćivanja, ugradnja modularnih elemenata za multimediju korištenjem Patch Panela, ugradnja mrežastih montažnih ploča ormara za multimediju, ugradnja nosača modema

- metal distribution box, white color RAL 9003
- in accordance with IEC 60670-1 and IEC 60670-24
- installation: In wall - brick and hollow walls
- 400V~, class I
- IP30
- IK08
- installation temperature: -25°C...+60°C

#### ACCESSORIES

- DIN rail for circuit breakers
- insulated connectors for earthing/neutral, suitable with glow wire test of 960 °C

#### POSSIBILITIES

- installation of lock with key, change of direction of opening door to left or right side, without dismantling the frame, installation of Patch Panel, keystone fixing standard, installation of modular elements by using Patch Panel, installation of mounting plate for distribution box for multimedia, installation of modem carrier



	MODULAR ORMAR 72 DIN ČETVEROREDNI	MODULAR DISTRIBUTION BOX 72 DIN FOUR-ROWS
<b>RBF4118</b>	PODŽBUKNI	IN-WALL
<b>RBS4118</b>	NADŽBUKNI	ON-WALL



	MODULAR ORMAR 18 DIN JEDNOREDNI	MODULAR DISTRIBUTION BOX 18 DIN ONE-ROW
<b>RBF1118</b>	PODŽBUKNI	IN-WALL
<b>RBS1118</b>	NADŽBUKNI	ON-WALL



	MODULAR ORMAR 90 DIN PETEROREDNI	MODULAR DISTRIBUTION BOX 90 DIN FIVE-ROWS
<b>RBF5118</b>	PODŽBUKNI	IN-WALL
<b>RBS5118</b>	NADŽBUKNI	ON-WALL



	MODULAR ORMAR 36 DIN DVOREDNI	MODULAR DISTRIBUTION BOX 36 DIN TWO-ROWS
<b>RBF2118</b>	PODŽBUKNI	IN-WALL
<b>RBS2118</b>	NADŽBUKNI	ON-WALL



	MODULAR ORMAR 54 DIN TROREDNI	MODULAR DISTRIBUTION BOX 54 DIN THREE-ROWS
<b>RBF3118</b>	PODŽBUKNI	IN-WALL
<b>RBS3118</b>	NADŽBUKNI	ON-WALL

	MODULAR ORMAR 108 DIN ŠESTEROREDNI	MODULAR DISTRIBUTION BOX 108 DIN SIX-ROWS
<b>RBF6118</b>	PODŽBUKNI	IN-WALL
<b>RBS6118</b>	NADŽBUKNI	ON-WALL



	MODULAR ORMAR 126 DIN SEDMOREDNI	MODULAR DISTRIBUTION BOX 126 DIN SEVEN-ROW
<b>RBF7118</b>	PODŽBUKNI	IN-WALL
<b>RBS7118</b>	NADŽBUKNI	ON-WALL



	MODULAR ORMAR 144 DIN OSMEROREDNI	MODULAR DISTRIBUTION BOX 144 DIN EIGHT-ROW
<b>RBF8118</b>	PODŽBUKNI	IN-WALL
<b>RBS8118</b>	NADŽBUKNI	ON-WALL



	MODULAR ORMAR 48 DIN DVOREDNI	MODULAR DISTRIBUTION BOX 48 DIN TWO-ROWS
<b>RBF2212</b>	PODŽBUKNI	IN-WALL
<b>RBS2212</b>	NADŽBUKNI	ON-WALL



	MODULAR ORMAR 72 DIN TROREDNI	MODULAR DISTRIBUTION BOX 72 DIN THREE-ROWS
<b>RBF3212</b>	PODŽBUKNI	IN-WALL
<b>RBS3212</b>	NADŽBUKNI	ON-WALL



	MODULAR ORMAR 96 DIN ČETVEROREDNI	MODULAR DISTRIBUTION BOX 96 DIN FOUR-ROWS
<b>RBF4212</b>	PODŽBUKNI	IN-WALL
<b>RBS4212</b>	NADŽBUKNI	ON-WALL



**RBF5212**  
**RBS5212**

MODULAR ORMAR 120 DIN PETEROREDNI	<i>MODULAR DISTRIBUTION BOX 120 DIN FIVE-ROWS</i>
PODŽBUKNI	IN-WALL
NADŽBUKNI	ON-WALL




**RBF6212**  
**RBS6212**

MODULAR ORMAR 144 DIN ŠESTEROREDNI	<i>MODULAR DISTRIBUTION BOX 144 DIN SIX-ROWS</i>
PODŽBUKNI	IN-WALL
NADŽBUKNI	ON-WALL




**RBF7212**  
**RBS7212**

MODULAR ORMAR 168 DIN SEDMEROREDNI	<i>MODULAR DISTRIBUTION BOX 168 DIN SEVEN-ROWS</i>
PODŽBUKNI	IN-WALL
NADŽBUKNI	ON-WALL

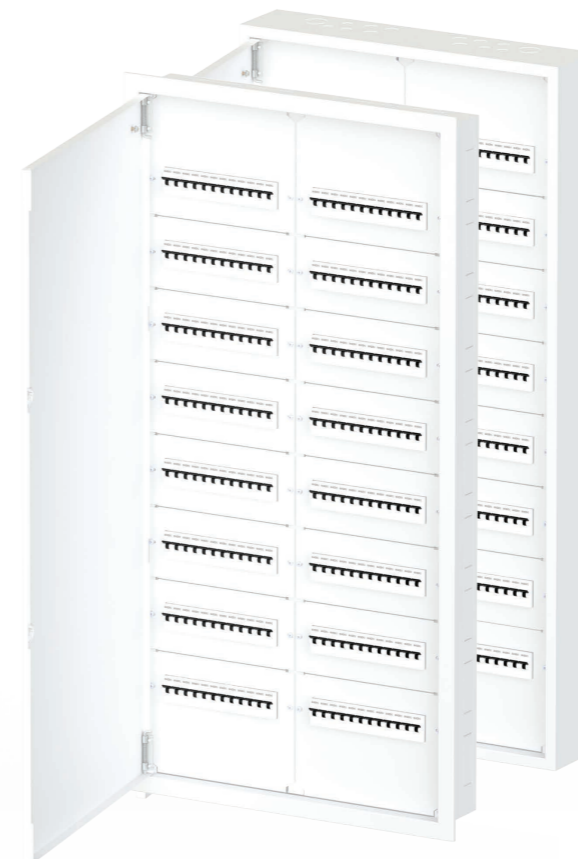


**RBF8212**  
**RBS8212**

MODULAR ORMAR 192 DIN OSMEROREDNI	<i>MODULAR DISTRIBUTION BOX 192 DIN EIGHT-ROWS</i>
PODŽBUKNI	IN-WALL
NADŽBUKNI	ON-WALL

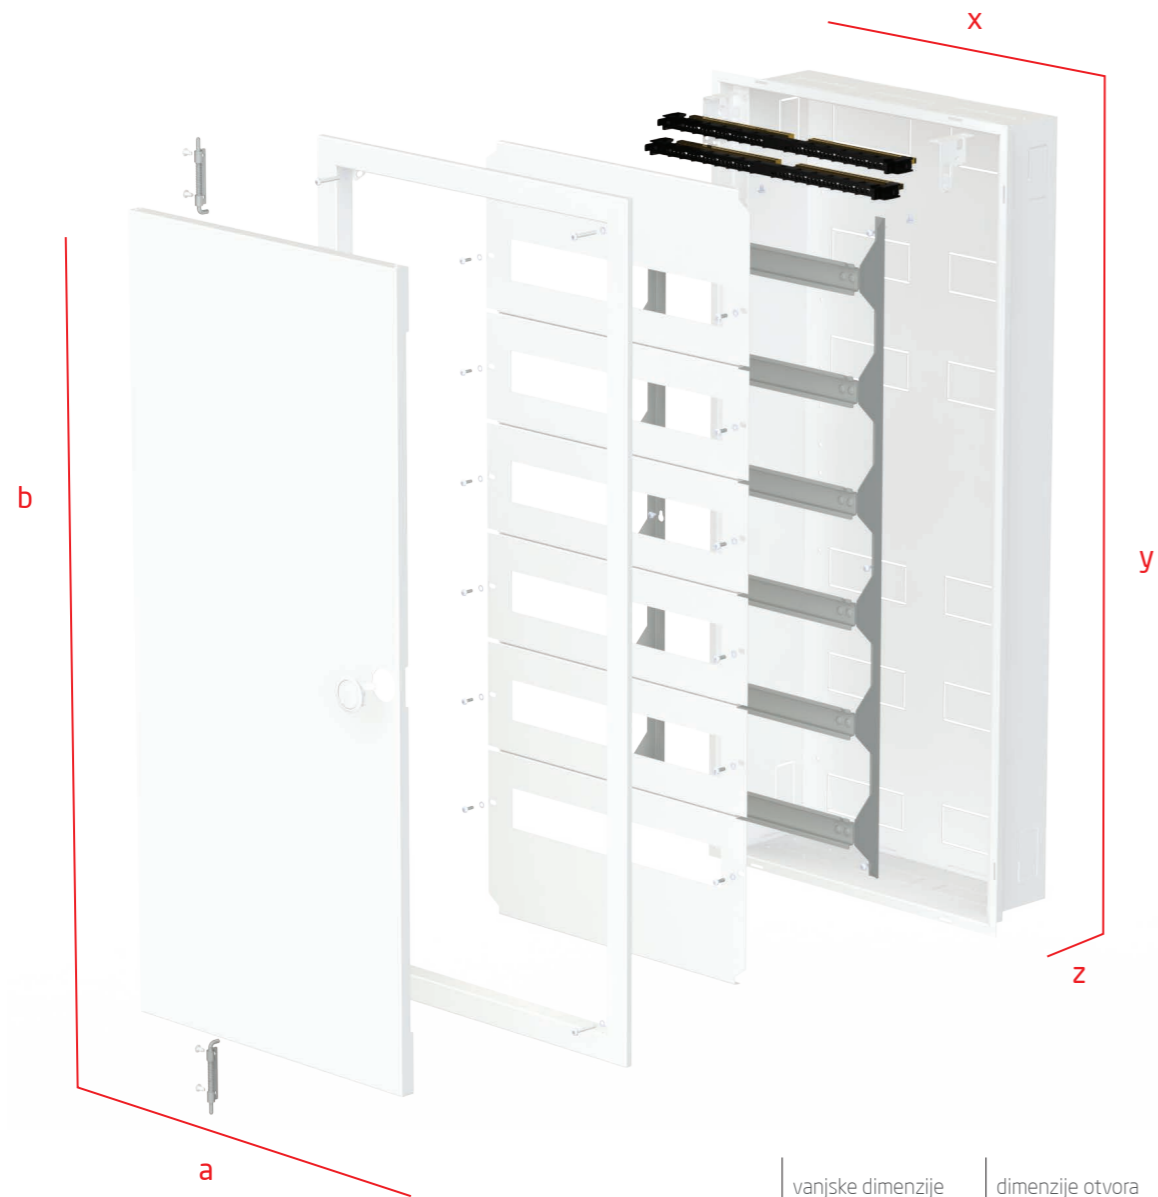

	vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)
<b>RBF1118</b>	486 x 336 x 121	428 x 278 x 115
<b>RBF2118</b>	486 x 461 x 121	428 x 403 x 115
<b>RBF3118</b>	486 x 586 x 121	428 x 528 x 115
<b>RBF4118</b>	486 x 711 x 121	428 x 653 x 115
<b>RBF5118</b>	486 x 836 x 121	428 x 778 x 115
<b>RBF6118</b>	486 x 961 x 121	428 x 903 x 115
<b>RBF7118</b>	486 x 1086 x 121	428 x 1028 x 115
<b>RBF8118</b>	486 x 1211 x 121	428 x 1153 x 115
<b>RBF2212</b>	649 x 502 x 121	590 x 442 x 115
<b>RBF3212</b>	649 x 627 x 121	590 x 567 x 115
<b>RBF4212</b>	649 x 752 x 121	590 x 692 x 115
<b>RBF5212</b>	649 x 877 x 121	590 x 817 x 115
<b>RBF6212</b>	649 x 1002 x 121	590 x 942 x 115
<b>RBF7212</b>	649 x 1127 x 121	590 x 1067 x 115
<b>RBF8212</b>	649 x 1252 x 121	590 x 1192 x 115

\* c - dubina / depth

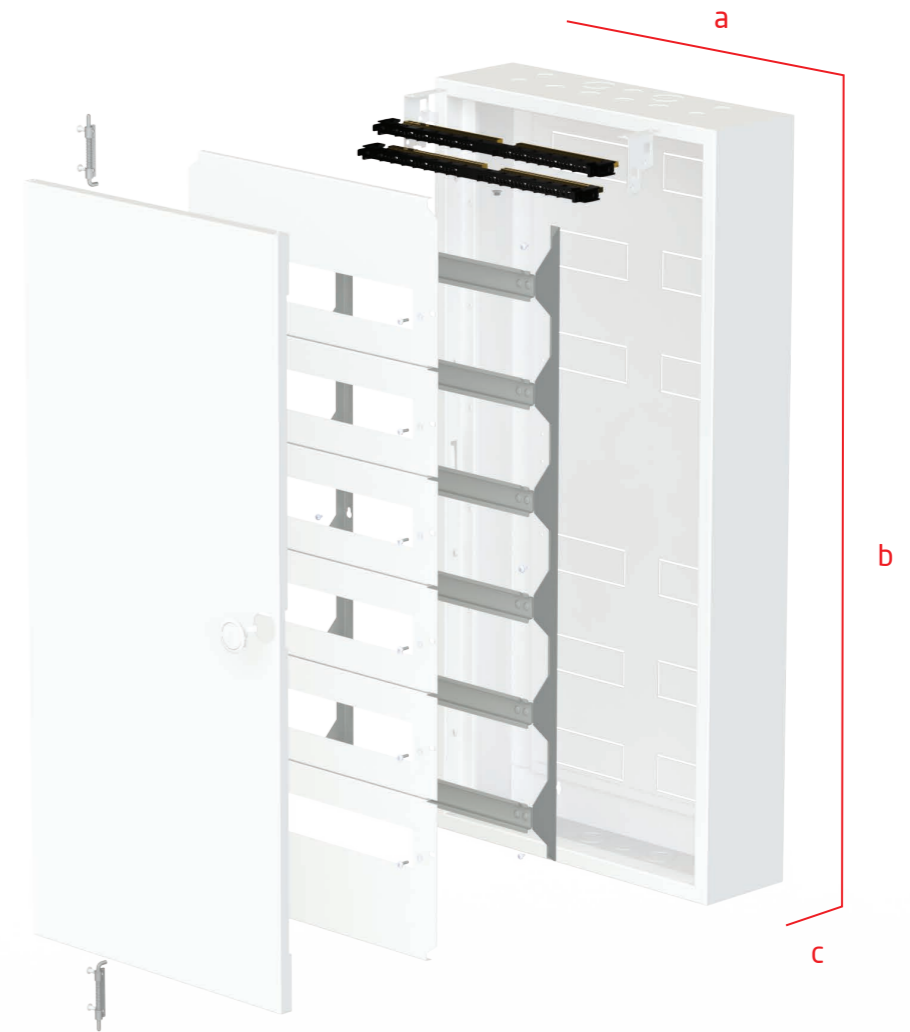

	vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)
<b>RBS1118</b>	450 x 300 x 130
<b>RBS2118</b>	450 x 425 x 130
<b>RBS3118</b>	450 x 550 x 130
<b>RBS4118</b>	450 x 675 x 130
<b>RBS5118</b>	450 x 800 x 130
<b>RBS6118</b>	450 x 925 x 130
<b>RBS7118</b>	450 x 1050 x 130
<b>RBS8118</b>	450 x 1175 x 130
<b>RBS2212</b>	613 x 466 x 130
<b>RBS3212</b>	613 x 591 x 130
<b>RBS4212</b>	613 x 716 x 130
<b>RBS5212</b>	613 x 841 x 130
<b>RBS6212</b>	613 x 966 x 130
<b>RBS7212</b>	613 x 1091 x 130
<b>RBS8212</b>	613 x 1216 x 130

\* c - dubina / depth

# 5.2.

mandeks



MARO

Modular razvodni ormari za slabu struju  
*Modular low voltage distribution boxes*

## 5.2. Modular razvodni ormari za slabu struju

### Modular low voltage distribution boxes

- metalni ormari bijele boje RAL 9003
- sukladno normi IEC 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnja u zid od opeke i šuplje stjenke / nadžbukna ugradnja
- 400V~, razred I
- IP20
- IK08
- temperatura ugradnje: -25°C...+60°C


#### MOGUĆNOSTI

- ugradnja bravice s ključem, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira, ugradnja Patch Panela, keystone standard pričvršćivanja, ugradnja modularnih elemenata za multimediju korištenjem Patch Panela, ugradnja mrežastih montažnih ploča ormara za multimediju, ugradnja nosača modema, ugradnja prednjih strana, ugradnja nosača osigurača, ugradnja izoliranih konektora za uzemljenje/neutralni vod (zadovoljavaju test užarenom niti na 960°C)

- metal distribution box, white color RAL 9003
- in accordance with IEC 60670-1 and IEC 60670-24
- installation: In wall - brick and hollow walls
- 400V~, class I
- IP20
- IK08
- installation temperature: -25°C...+60°C

#### POSSIBILITIES

- installation of lock with key, change of direction of opening door to left or right side, without dismantling the frame, installation of Patch Panel, keystone fixing standard, installation of modular elements by using Patch Panel, installation of mounting plate for distribution box for multimedia, installation of modem carrier, installation of front panel, installation of DIN rail, installation of insulated connectors for earthing/neutral (suitable with glow wire test of 960 °C)

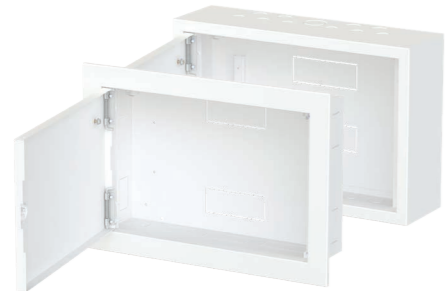

**REF1118**

MODULAR ORMAR ZA SLABU STRUJU  
18 DIN JEDNOREDNI

PODŽBUKNI

MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
18 DIN ONE-ROW

IN-WALL

**RES1118**

NADŽBUKNI

ON-WALL



**REF2118**

MODULAR ORMAR ZA SLABU STRUJU  
36 DIN DVOREDNI

PODŽBUKNI

MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
36 DIN TWO-ROWS

IN-WALL

**RES2118**

NADŽBUKNI

ON-WALL



**REF3118**

MODULAR ORMAR ZA SLABU STRUJU  
54 DIN TROREDNI

PODŽBUKNI

MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
54 DIN THREE-ROWS

IN-WALL

**RES3118**

NADŽBUKNI

ON-WALL



**REF4118**

MODULAR ORMAR ZA SLABU STRUJU  
72 DIN ČETVEROREDNI

PODŽBUKNI

MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
72 DIN FOUR-ROWS

IN-WALL

**RES4118**

NADŽBUKNI

ON-WALL



**REF5118**

MODULAR ORMAR ZA SLABU STRUJU  
90 DIN PETEROREDNI

PODŽBUKNI

MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
90 DIN FIVE-ROWS

IN-WALL

**RES5118**

NADŽBUKNI

ON-WALL



**REF6118**

MODULAR ORMAR ZA SLABU STRUJU  
108 DIN ŠESTEROREDNI

PODŽBUKNI

MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
108 DIN SIX-ROWS

IN-WALL

**RES6118**

NADŽBUKNI

ON-WALL



**REF7118**  
**RES7118**

MODULAR ORMAR  
ZA SLABU STRUJU  
126 DIN SEDMOREDNI

PODŽBUKNI  
NADŽBUKNI

*MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
126 DIN SEVEN-ROW*

IN-WALL  
ON-WALL




**REF8118**  
**RES8118**

MODULAR ORMAR  
ZA SLABU STRUJU  
144 DIN OSMEROREDNI

PODŽBUKNI  
NADŽBUKNI

*MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
144 DIN EIGHT-ROW*

IN-WALL  
ON-WALL

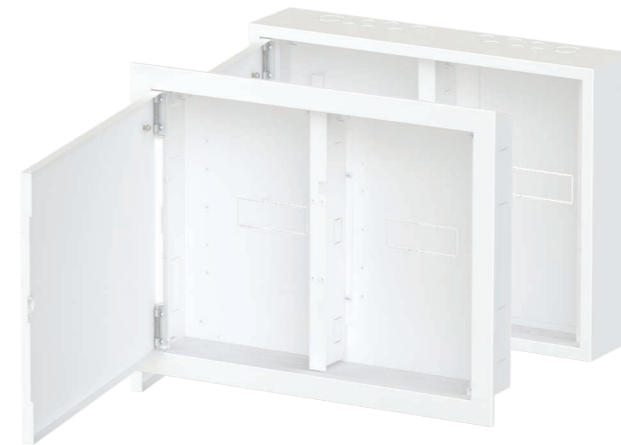

**REF2212**  
**RES2212**

MODULAR ORMAR  
ZA SLABU STRUJU  
48 DIN DVOREDNI

PODŽBUKNI  
NADŽBUKNI

*MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
48 DIN TWO-ROWS*

IN-WALL  
ON-WALL



**REF3212**  
**RES3212**

MODULAR ORMAR  
ZA SLABU STRUJU  
72 DIN TROREDNI

PODŽBUKNI  
NADŽBUKNI

*MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
72 DIN THREE-ROWS*

IN-WALL  
ON-WALL



**REF4212**  
**RES4212**

MODULAR ORMAR  
ZA SLABU STRUJU  
96 DIN ČETVEROREDNI

PODŽBUKNI  
NADŽBUKNI

*MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
96 DIN FOUR-ROWS*

IN-WALL  
ON-WALL



**REF5212**  
**RES5212**

MODULAR ORMAR  
ZA SLABU STRUJU  
120 DIN PETEROREDNI  
MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
120 DIN FIVE-ROWS  
IN-WALL  
ON-WALL



**REF6212**  
**RES6212**

MODULAR ORMAR  
ZA SLABU STRUJU  
144 DIN ŠESTEROREDNI  
MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
144 DIN SIX-ROWS  
IN-WALL  
ON-WALL




**REF7212**  
**RES7212**

MODULAR ORMAR  
ZA SLABU STRUJU  
168 DIN SEDMEROREDNI  
MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
168 DIN SEVEN-ROWS  
IN-WALL  
ON-WALL



**REF8212**  
**RES8212**

MODULAR ORMAR  
ZA SLABU STRUJU  
192 DIN OSMEROREDNI  
MODULAR LOW VOLTAGE  
DISTRIBUTION BOX  
192 DIN EIGHT-ROWS  
IN-WALL  
ON-WALL

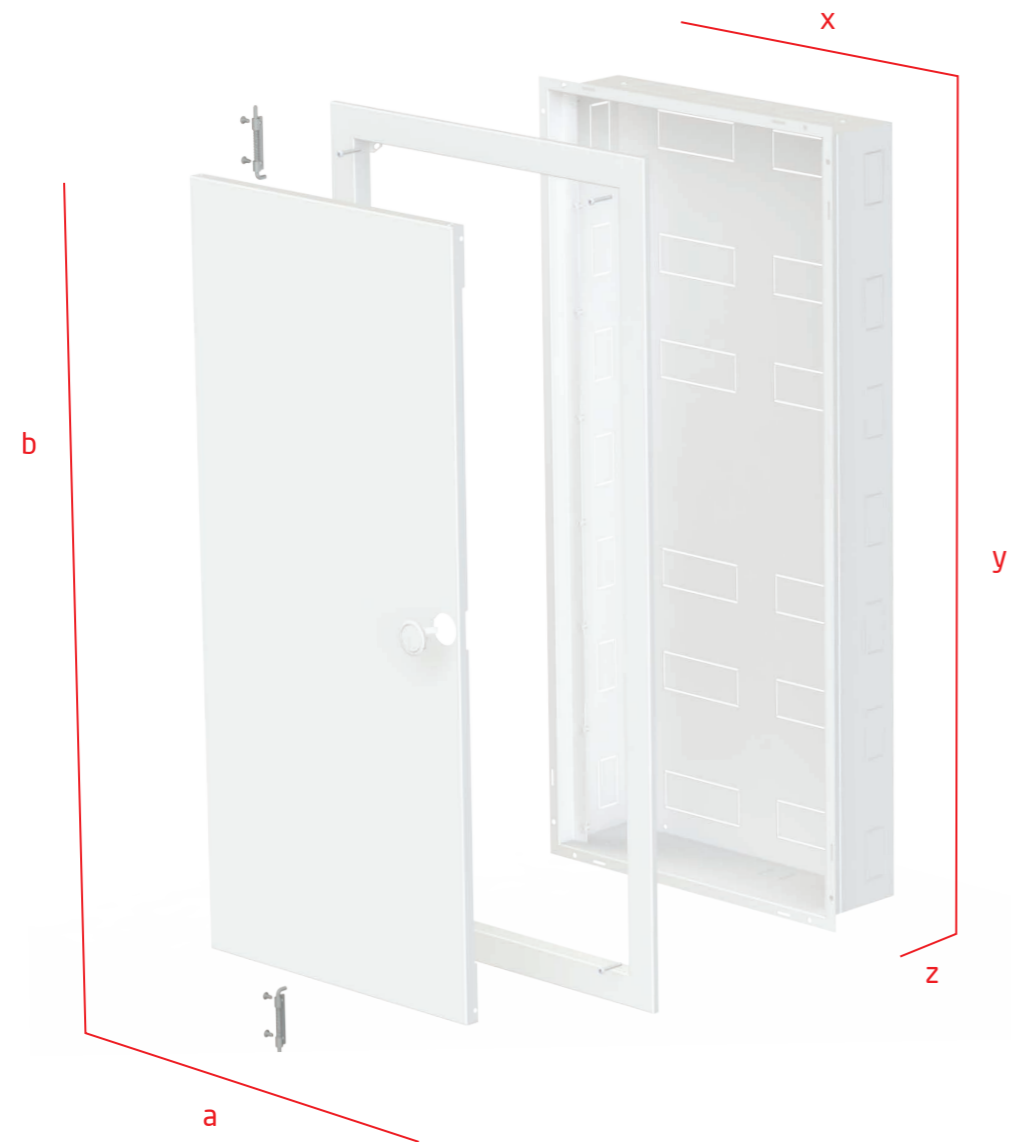

	vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)
<b>REF1118</b>	486 x 336 x 121	428 x 278 x 115
<b>REF2118</b>	486 x 461 x 121	428 x 403 x 115
<b>REF3118</b>	486 x 586 x 121	428 x 528 x 115
<b>REF4118</b>	486 x 711 x 121	428 x 653 x 115
<b>REF5118</b>	486 x 836 x 121	428 x 778 x 115
<b>REF6118</b>	486 x 961 x 121	428 x 903 x 115
<b>REF7118</b>	486 x 1086 x 121	428 x 1028 x 115
<b>REF8118</b>	486 x 1211 x 121	428 x 1153 x 115
<b>REF2212</b>	649 x 502 x 121	590 x 442 x 115
<b>REF3212</b>	649 x 627 x 121	590 x 567 x 115
<b>REF4212</b>	649 x 752 x 121	590 x 692 x 115
<b>REF5212</b>	649 x 877 x 121	590 x 817 x 115
<b>REF6212</b>	649 x 1002 x 121	590 x 942 x 115
<b>REF7212</b>	649 x 1127 x 121	590 x 1067 x 115
<b>REF8212</b>	649 x 1252 x 121	590 x 1192 x 115


\* c - dubina / depth



	vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)
<b>RES1118</b>	450 x 300 x 130
<b>RES2118</b>	450 x 425 x 130
<b>RES3118</b>	450 x 550 x 130
<b>RES4118</b>	450 x 675 x 130
<b>RES5118</b>	450 x 800 x 130
<b>RES6118</b>	450 x 925 x 130
<b>RES7118</b>	450 x 1050 x 130
<b>RES8118</b>	450 x 1175 x 130
<b>RES2212</b>	613 x 466 x 130
<b>RES3212</b>	613 x 591 x 130
<b>RES4212</b>	613 x 716 x 130
<b>RES5212</b>	613 x 841 x 130
<b>RES6212</b>	613 x 966 x 130
<b>RES7212</b>	613 x 1091 x 130
<b>RES8212</b>	613 x 1216 x 130

\* c - dubina / depth

# 5.3.

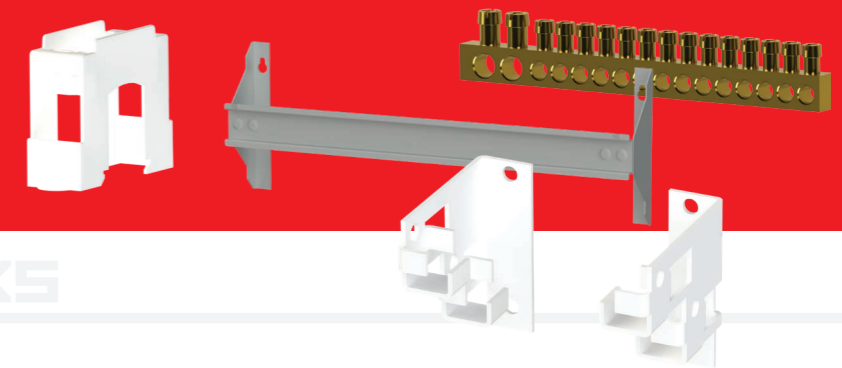

mandeks

MARO

Pribor Modular  
*Modular Accessories*

# 5.3. Pribor Modular

## Modular accessories

5.3.

		mogućnost montaže sabirnice terminal installation possibility	
IZOLACIJA ZA SABIRNICU 12 DIN ISOLATION FOR TERMINALS 12 DIN	<b>RBBS12</b>		RBNS4, RBNS10, RBNS16
IZOLACIJA ZA SABIRNICU 18 DIN ISOLATION FOR TERMINALS 18 DIN	<b>RBBS18</b>		RBNS4, RBNS10, RBNS16
IZOLACIJA ZA SABIRNICU 18 DIN Ø7mm ISOLATION FOR TERMINALS 18 DIN Ø7mm	<b>RBBS18-7</b>		RBNS15
		presjek rupe hole dimension	
NOSAČ SA SABIRNICOM 12 DIN TERMINAL STRIP 12 DIN	<b>RB12</b>		(2x16)+(14x10), (2x16)+(14x10), (2x10)+(14x6), (2x10)+(14x6)
NOSAČ SA SABIRNICOM 18 DIN TERMINAL STRIP 18 DIN	<b>RB09</b>		(2x16)+(14x10), (2x16)+(14x10), (2x10)+(14x6), (2x10)+(14x6)
NOSAČ SA SABIRNICOM 18 DIN Ø7mm TERMINAL STRIP 18 DIN Ø7mm	<b>RB09-7</b>		15x25, 15x25 15x16, 15x16
		moguća ugradnja possible installation	
MESINGANA SABIRNICA 6x9x32 mm BRASS TERMINAL STRIP 6x9x32 mm	<b>RBNS4</b>		RBBS12, RBBS18 (2x16)+(2x10), (2x10)+(2x6)
MESINGANA SABIRNICA 6x9x69 mm BRASS TERMINAL STRIP 6x9x69 mm	<b>RBNS10</b>		RBBS12, RBBS18 (2x16)+(8x10), (2x10)+(8x6)
MESINGANA SABIRNICA 6x9x105 mm BRASS TERMINAL STRIP 6x9x105 mm	<b>RBNS16</b>		RBBS12, RBBS18 (2x16)+(14x10), (2x10)+(14x6)
MESINGANA SABIRNICA 6x10,5x156 mm BRASS TERMINAL STRIP 6x10,5x156 mm	<b>RBNS15</b>		RBBS18-7 15x25 15x16

**RB13**  
BRAVICA S KLJUČEM ZA RAZVODNE ORMARE  
LOCK WITH KEY FOR DISTRIBUTION BOX

**RB13BK**  
BRAVICA METALIS RAZVODNOG ORMARA  
LOCK FOR METALIS DISTRIBUTION BOX

**RE11**  
NOSAČ MODEMA  
MODEM CARRIER

**RE11D**  
NOSAČ MODEMA ZA UGRADNJU NA DIN NOSAČ  
MODEM CARRIER DIN RAIL INSTALLATION

**RBA112MPS**  
MREŽASTA MONTAŽNA PLOČA MODULAR 12 DIN + 3X2M  
MOUNTING PLATE MODULAR 12 DIN + 3X2M

**RB17**  
NOSAČ SA SABIRNICOM N (7x16mm<sup>2</sup>)  
TERMINAL STRIP N (7x16mm<sup>2</sup>)

**NM21**  
NOSAČ 2M  
MOUNTING FRAME 2M

**RB10**  
ADAPTER ZA DIN TRAIČNICU 35mm 1M  
ADAPTER FOR DIN RAIL 35mm 1M

**RB11**  
ADAPTER ZA DIN TRAIČNICU 35mm 2M  
ADAPTER FOR DIN RAIL 35mm 2M

**RBA118MPS**  
MREŽASTA MONTAŽNA PLOČA MODULAR 18 DIN + 3X2M  
MOUNTING PLATE MODULAR 18 DIN + 3X2M

**RBA1TC**  
NOSAČ SABIRNICE MODULAR JEDNOSTRUKI  
SET FOR INSTALLATION OF TERMINALS MODULAR SINGLE

**RBA2TC**  
NOSAČ SABIRNICE MODULAR DVOSTRUKI  
SET FOR INSTALLATION OF TERMINALS MODULAR DOUBLE

**RBA13**  
SET BAGLAMA MODULAR ORMARA  
HINGE SET MODULAR

**RB16**  
POPUNA PREDNJE STRANE ORMARA 9DIN  
BLIND ELEMENT FOR DISTRIBUTION BOX 9DIN

**RBA118FPPS**  
PREDNJA STRANA JEDNOREDNOG MODULAR 1X18 DIN  
FRONT PANEL 1X18 DIN FOR ONE ROW ENCLOSURE MODULAR

**RB18ECT**  
PATCH PANEL MODULAR ORMARA 12DIN 12M POD KUTOM 45° EC  
PATCH PANEL FOR MODULAR DISTRIBUTION BOXES 12DIN 12M 45° ANGLE EC

**RB18ECN**  
PATCH PANEL MODULAR ORMARA 18DIN 18M POD KUTOM 45° EC  
PATCH PANEL FOR MODULAR DISTRIBUTION BOXES 18DIN 18M 45° ANGLE EC

**RB19ECT**  
PATCH PANEL MODULAR ORMARA 12DIN 12M POD KUTOM 90° EC  
PATCH PANEL FOR MODULAR DISTRIBUTION BOXES 12DIN 12M 90° ANGLE EC

**RB19ECN**  
PATCH PANEL MODULAR ORMARA 18DIN 18M POD KUTOM 90° EC  
PATCH PANEL FOR MODULAR DISTRIBUTION BOXES 18DIN 18M 90° ANGLE EC

**RBA112MP**  
MODULARNA MREŽASTA MONTAŽNA PLOČA MODULAR 12 DIN  
MOUNTING PLATE MODULAR 12 DIN

**RBA112FPT**  
PREDNJA STRANA MODULAR 1X12 DIN GORNJA/DONJA  
TOP/BOTTOM FRONT PANEL 1X12 DIN MODULAR

**RBA112FP**  
PREDNJA STRANA MODULAR 1X12 DIN  
FRONT PANEL 1X12 DIN MODULAR

**RBA112DES**  
PREGRADA JAKE I SLABE STRUJE MODULAR 12 DIN + 3X2M  
LOW AND HIGH VOLTAGE DIVIDING ELEMENT MODULAR 12 DIN + 3X2M

**RBA112DE**  
PREGRADA JAKE I SLABE STRUJE MODULAR 12 DIN  
LOW AND HIGH VOLTAGE DIVIDING ELEMENT MODULAR 12 DIN

**RBA118MP**  
MODULARNA MREŽASTA MONTAŽNA PLOČA MODULAR 18 DIN  
MOUNTING PLATE MODULAR 18 DIN

**RBA118FPT**  
PREDNJA STRANA MODULAR 1X18 DIN GORNJA/DONJA  
TOP/BOTTOM FRONT PANEL 1X18 DIN MODULAR

**RBA118FP**  
PREDNJA STRANA MODULAR 1X18 DIN  
FRONT PANEL 1X18 DIN MODULAR

**RBA118DES**  
PREGRADA JAKE I SLABE STRUJE MODULAR 18 DIN + 3X2M  
LOW AND HIGH VOLTAGE DIVIDING ELEMENT MODULAR 18 DIN + 3X2M

**RBA118DE**  
PREGRADA JAKE I SLABE STRUJE MODULAR 18 DIN  
LOW AND HIGH VOLTAGE DIVIDING ELEMENT MODULAR 18 DIN



**RBA112DR**  
NOSAČ OSIGURAČA  
MODULAR 12 DIN  
*DIN RAIL 12 DIN  
MODULAR*



**RBA212DR**  
NOSAČ OSIGURAČA  
MODULAR 2X12 DIN  
*DIN RAIL 2X12 DIN  
MODULAR*



**RBA312DR**  
NOSAČ OSIGURAČA  
MODULAR 3X12 DIN  
*DIN RAIL 3X12 DIN  
MODULAR*



**RBA412DR**  
NOSAČ OSIGURAČA  
MODULAR 4X12 DIN  
*DIN RAIL 4X12 DIN  
MODULAR*



**RBA512DR**  
NOSAČ OSIGURAČA  
MODULAR 5X12 DIN  
*DIN RAIL 5X12 DIN  
MODULAR*



**RBA612DR**  
NOSAČ OSIGURAČA  
MODULAR 6X12 DIN  
*DIN RAIL 6X12 DIN  
MODULAR*




**RBA712DR**  
NOSAČ OSIGURAČA  
MODULAR 7X12 DIN  
*DIN RAIL 7X12 DIN  
MODULAR*



**RBA812DR**  
NOSAČ OSIGURAČA  
MODULAR 8X12 DIN  
*DIN RAIL 8X12 DIN  
MODULAR*



**RBA118DR**  
NOSAČ OSIGURAČA  
MODULAR 18 DIN  
*DIN RAIL 18 DIN  
MODULAR*



**RBA218DR**  
NOSAČ OSIGURAČA  
MODULAR 2X18 DIN  
*DIN RAIL 2X18 DIN  
MODULAR*



**RBA318DR**  
NOSAČ OSIGURAČA  
MODULAR 3X18 DIN  
*DIN RAIL 3X18 DIN  
MODULAR*



**RBA418DR**  
NOSAČ OSIGURAČA  
MODULAR 4X18 DIN  
*DIN RAIL 4X18 DIN  
MODULAR*




**RBA518DR**  
NOSAČ OSIGURAČA  
MODULAR 5X18 DIN  
*DIN RAIL 5X18 DIN  
MODULAR*



**RBA618DR**  
NOSAČ OSIGURAČA  
MODULAR 6X18 DIN  
*DIN RAIL 6X18 DIN  
MODULAR*



**RBA718DR**  
NOSAČ OSIGURAČA  
MODULAR 7X18 DIN  
*DIN RAIL 7X18 DIN  
MODULAR*

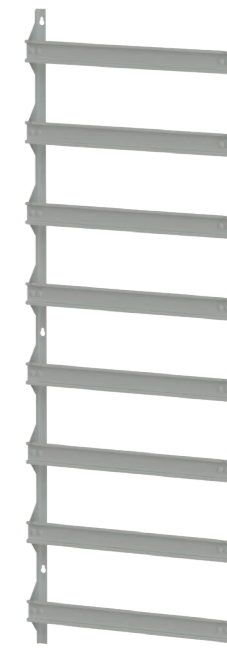

**RBA818DR**  
NOSAČ OSIGURAČA  
MODULAR 8X18 DIN  
*DIN RAIL 8X18 DIN  
MODULAR*

# 6.1.

mandeks



DOMINO

Domino razvodni ormari  
*Domino distribution boxes*

# 6.1. Domino razvodni ormari

## Domino distribution boxes

- plastična vrata i kućište ormara
- područje ugradnje: nažbukna ugradnja
- prozirna/zadimljena plastična vrata
- sukladno normi CEI 23-48 - I Ed. 1998 i CEI 23-49:1996 + V1:2001 + V2:2003
- nazivna struja: za uređaje do 63A
- 400V~
- IP66

### PRILOŽENA OPREMA

- nosači osigurača
- baglame za tijelo i prednji dio ormara
- pribor za instalaciju na zid
- slijepi poklopci

### MOGUĆNOSTI

- modularnost/ moguće kombiniranje ormara DOMINO međusobno, pomoću uvodnica, ugradnja bravice sa ključem ili trokutasti plastični ključ, ugradnja Modul opreme, korištenjem adaptera RB10 i RB11

- plastic door and base
- installation: on wall
- transparent/smoky plastic door
- in accordance with CEI 23-48 - I Ed. 1998 and CEI 23-49:1996 + V1:2001 + V2:2003
- rated current: up to 63A
- 400V~
- IP66

### ACCESSORIES

- DIN rail for circuit breakers
- hinge for body and front part of distribution box
- accessories for on wall installation
- blanks

### POSSIBILITIES

- modularity - combining distribution box DOMINO mutually, installation of lock with key or triangular plastic key, installation of Modul program, by using adapters RB10 and RB11



**672.2002** RAZVODNI ORMAR DOMINO 2 DIN,  
135x76x102 JEDNOREDNI N/Ž  
DISTRIBUTION BOX DOMINO 2 DIN,  
135x76x102 ONE ROW ON-WALL



**672.2004** RAZVODNI ORMAR DOMINO 4 DIN,  
190x112x106 JEDNOREDNI N/Ž  
DISTRIBUTION BOX DOMINO 4 DIN,  
190x112x106 ONE ROW ON-WALL



**672.2008** RAZVODNI ORMAR DOMINO 8 DIN,  
190x184x106 JEDNOREDNI N/Ž  
DISTRIBUTION BOX DOMINO 8 DIN,  
190x184x106 ONE ROW ON-WALL



**672.2012** RAZVODNI ORMAR DOMINO 12 DIN,  
250x256x140 JEDNOREDNI N/Ž  
DISTRIBUTION BOX DOMINO 12 DIN,  
250x256x140 ONE ROW ON-WALL



**672.2016** RAZVODNI ORMAR DOMINO 16 DIN,  
250x328x140 JEDNOREDNI N/Ž  
DISTRIBUTION BOX DOMINO 16 DIN,  
250x328x140 ONE ROW ON-WALL



**672.4024** RAZVODNI ORMAR DOMINO 24 DIN,  
400x256x140 DVOREDNI N/Ž  
DISTRIBUTION BOX DOMINO 24 DIN,  
400x256x140 TWO ROWS ON-WALL



**672.4032** RAZVODNI ORMAR DOMINO 32 DIN,  
400x328x140 DVOREDNI N/Ž  
DISTRIBUTION BOX DOMINO 32 DIN,  
400x328x140 TWO ROWS ON-WALL




**672.5048** RAZVODNI ORMAR DOMINO 48 DIN,  
550x328x140 TROREDNI N/Ž  
DISTRIBUTION BOX DOMINO 48 DIN,  
550x328x140 THREE ROWS ON-WALL

6.1.



**672.7064** RAZVODNI ORMAR DOMINO 64 DIN,  
700x328x140 ČETVEROREDNI N/Ž  
DISTRIBUTION BOX DOMINO 64 DIN,  
700x328x140 FOUR ROWS ON-WALL

6.2.

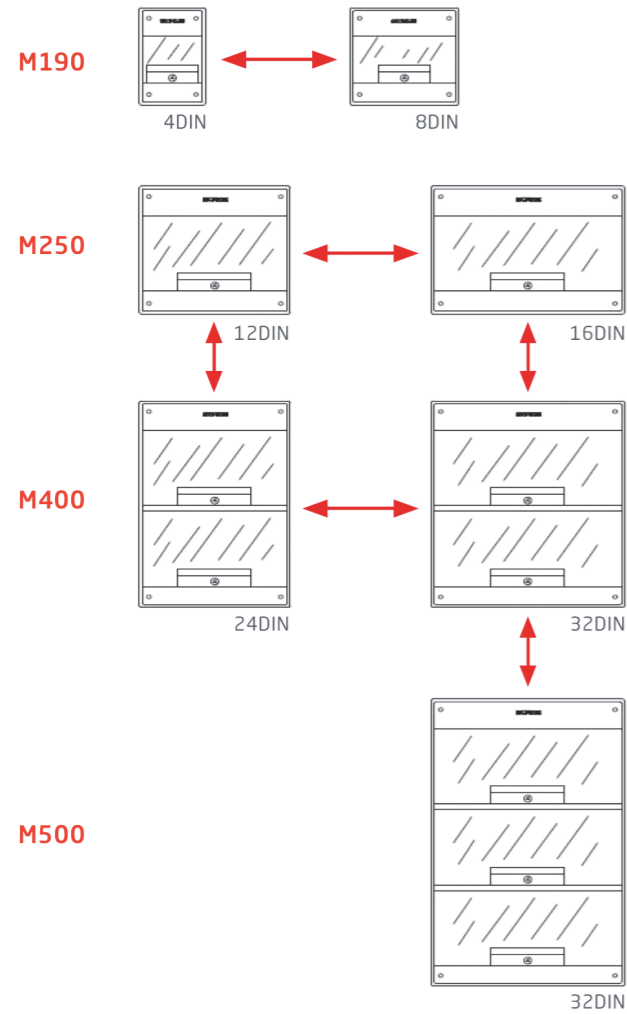

DOMINO

Pribor Domino  
Domino accessories

## 6.2. Pribor Domino

*Domino accessories*



**654.0365** NOSAČ SA SABIRNICOM DOMINO ORMARA 4 DIN  
*TERMINAL STRIP FOR DOMINO DISTRIBUTION BOX 4 DIN*



**654.0363** NOSAČ SA SABIRNICOM (5x16mm + 5x10mm)  
DOMINO ORMARA 8 DIN  
*TERMINAL STRIP (5x16mm + 5x10mm) FOR DOMINO  
DISTRIBUTION BOX 8 DIN*



**654.0361** NOSAČ SA SABIRNICOM (5x16mm + 5x10mm) DOMINO  
ORMARA 12/24 DIN  
*TERMINAL STRIP (5x16mm + 5x10mm) FOR DOMINO  
DISTRIBUTION BOX 12/24 DIN*



**654.0362** NOSAČ SA SABIRNICOM (5x16mm + 5x10mm) DOMINO  
ORMARA 16/32/48 DIN  
*TERMINAL STRIP (5x16mm + 5x10mm) FOR DOMINO  
DISTRIBUTION BOX 16/32/48 DIN*



**654.0360** DODATNA SABIRNICA (5x16mm + 5x10mm) ZA  
654.0361/654.0362  
*ADDITIONAL TERMINAL STRIP (5x16mm + 5x10mm)  
FOR 654.0361/654.0362*



**654.0020** ZIDNI NOSAČ DOMINO ORMARA  
*WALL CARRIER SET DOMINO*



**654.0030** OPREMA ZA PEČAČENJE  
*COVER SEALING KIT*



**654.0070** BRAVICA S KLJUČEM DOMINO ORMARA  
*LOCK WITH KEY KIT DOMINO*



